Partnered Pavement Research Center

Annual Report

Fiscal Year 2020-2021





California Department of Transportation/ University of California Pavement Research Center







About the Partnered Pavement Research Center

The Partnered Pavement Research Center (PPRC) is operated by the California Department of Transportation (Caltrans) and the University of California Pavement Research Center (UCPRC).

Caltrans Mission

Provide a safe and reliable transportation network that serves all people and respects the environment.

UCPRC Mission

Research, development, and implementation to support decision-making by Caltrans and other partners to provide economically and environmentally sustainable, equitably distributed, multifunctional pavement systems.

Caltrans Vision

A brighter future for all through a world-class transportation network.

UCPRC Vision

Caltrans and other partners will have continuously improving state-of-the-art pavement technology to maximize the level of service to all users of California's pavements, while optimizing the results from expenditures on pavement infrastructure and minimizing the environmental impacts. These goals will be accomplished by strategic planning for current and future challenges and opportunities, and by execution of projects from idea to implementation through conceptual studies, research, development, implementation support, and operational support.

Welcome to the FY 2020-2021 Annual Report for the Partnered Pavement Research Center!

The following are highlights of work that the Caltrans/UCPRC Partnered Pavement Research Center (PPRC) implemented during the last fiscal year:

Updated mechanistic-empirical pavement design methods for asphalt (*CalME*) and concrete (*Pavement ME*) surfaced pavements by calibration with Caltrans field performance data.

The calibrations took a new "big data" approach developed by the UCPRC that made use of Caltrans investments in improved data for the pavement management system (*PaveM*).

Guidance for selection of projects, design, and construction for full-depth and partial-depth in-place recycling.

These guidelines are tied to an intensive effort by Caltrans to increase recycling for projects where it will provide life cycle cost and environmental benefits.

Release of the new web-based version of *CaIME* (version 3.0), the mechanistic-empirical pavement design software for asphalt surfaced pavements.

CalME was developed by the UCPRC with Caltrans funding, and it is being used on large pavement rehabilitation and reconstruction projects around the state.

Use of performance-related specifications (PRS) and new testing methods for asphalt materials for the reconstruction of Interstate 5 through Sacramento.

An asphalt mix with 25% recycled asphalt pavement content was used for the main structural layer. Life cycle cost savings of \$37 million to Caltrans were identified from use of the innovative and PRS-specified materials as part of the Road Repair and Accountability Act of 2017 (SB 1). The UCPRC was given a Special Recognition and Appreciation Award as a Caltrans Efficiency Champion for supporting this project.

Implementation of concrete overlay on asphalt pavement by Caltrans on a pilot project on State Route 113 in Yolo County.

The project used guidance from research and accelerated pavement testing by the UCPRC that checked this strategy, which has been used in states with wet and humid climates but not in California's dry environment.

Updated environmental Life Cycle Assessment for Pavement (*eLCAP*) web-based software from the UCPRC.

eLCAP was reviewed by external reviewers, and preparations were made for piloting the software. *eLCAP* is a web-based tool to calculate the project-level environmental impacts (following the US Environmental Protection Agency's TRACI indicators) of the materials, construction, maintenance, rehabilitation, use, and end-of-life stages of pavement infrastructure.

Case studies demonstrating an approach developed by the UCPRC for multi-criteria decision support of alternative strategies for reducing greenhouse gas emissions.

This approach uses environmental life cycle assessment and life cycle cost analysis to calculate "bang for the buck" for each strategy and help prioritize a set of strategies to maximize investments. A parallel project funded by Caltrans through the National Center for Sustainable Transportation demonstrated use of the approach for local government decision-making through case studies in Los Angeles and Yolo counties.

New performance models for cracking and smoothness for the Caltrans pavement management system.

Performance models used to predict pavement conduction for use in planning of future maintenance and rehabilitation were updated using three more years of pavement condition data and new modeling methods.

Technical support to Caltrans for implementation of environmental product declarations (EPDs) for transportation materials as called for in the Buy Clean California Act (AB 262).

The UCPRC provided technical support for implementation of this legislation, which requires materials producers to provide EPDs, declarations of environmental impacts based on cradle-to-gate life cycle assessment. Support included help in creating the framework, database, and process documents and review of the quality and consistency of data in the EPDs.

Field data collection and analysis to understand the effects of pavement structure type on the fuel use of vehicles.

Field data were used to develop empirical models for fuel use. Mechanistic structural response models and software code were also developed.

Updates to the Caltrans Highway Design Manual by the UCPRC.

These updates reflect the transition to mechanistic-empirical design methods, the use of performance-related specifications, and research on in-place recycling and other improvements in pavement technology and practice.

Continued support to Caltrans operations of the pavement management system, mechanistic-empirical design, life cycle assessment, and life cycle cost analysis software and guidance.

This support task provides real-time help with questions from software users, updating of software in response to user comments, and development and periodic updating of guidance documents and training.

Continued operation of the calibration and certification centers for Caltrans and industry smoothness and falling weight deflectometer (FWD) testing personnel and equipment.

The UCPRC provided staff for testing, calibration data analysis, and certifications of profilers at the profiler certification test section in Sacramento and the FWD certification center at the UCPRC research site in Davis.

This fiscal year's research, development, and implementation support is from both the 2017-2020 PPRC contract, completed in September 2020, and from the current 2020-2023 contract. The following sections of this annual report include updates on current projects and summaries of reports published this fiscal year.

The UCPRC staff, students, and faculty and Caltrans staff will continue to work together to improve pavements, enhance their contributions to the quality of life across California, and reduce their environmental impacts.

John Harvey, Director and Principal Investigator, UCPRC David J. Jones, Associate Director and Co-Principal Investigator, UCPRC Jeremy D. Lea, Co-Principal Investigator, UCPRC Angel Mateos, UC Berkeley Director and Co-Principal Investigator, UCPRC UCPRC staff and students

Table of Contents

Introduction: Pavement Research Processes and Status
Mechanistic-Empirical Design9
Performance-Related Specifications
Recycling
Sustainability
Pavement Management System40
Support Tasks
Appendix A: UCPRC Publications FY 2020-2021
Appendix B: Pavement Research Roadmaps80

Introduction: Pavement Research Processes and Status



This annual report provides an overview of the strategic plan, research roadmaps, current research areas, and projects for the Caltrans/UCPRC Partnered Pavement Research Center (PPRC) and progress over FY 2020-2021.

Strategic Planning and Contract Development Process and Documents

Caltrans and the UCPRC have a robust process for working with industry and other partners to strategically identify, prioritize, plan, and communicate how to solve current and future challenges and take advantage of opportunities. The main strategic planning process is conducted as part of the preparation of each PPRC contract, typically every three years. The strategic planning documents are reviewed and updated as needed on an interim basis during the three-year contracts.

Strategic Planning Elements

The **Strategic Planning Process** is managed by the Caltrans Division of Research, Innovation and System Information (DRISI); the Caltrans Division of Maintenance/Office of Pavement; and the UCPRC. The outcomes of this process include updated and new Pavement Research Roadmaps and a prioritized list of projects for inclusion in the three-year contract.

The **Pavement Research Roadmaps** include one roadmap for each Caltrans strategic goal. Each roadmap identifies the scope and vision of the strategic goal; projects needed for conceptual studies, research, development, and implementation support to achieve the vision; and progress toward the vision in terms of completed, current, and next projects.

The **Partnered Pavement Research Center Contract** shows all research, development and implementation projects, support tasks for Caltrans operations, and project support tasks.

Current Pavement Research Roadmaps¹

- Mechanistic-Empirical Design of Asphalt Pavement
- Mechanistic-Empirical Design of Concrete Pavement
- In-Place and Cold Central Plant Recycling
- Performance-Related Specifications for Concrete Including Construction Quality Assurance/ Quality Control (QA/QC)

¹ The complete Pavement Research Roadmaps are included in Appendix B.

- Performance-Related Specifications for Asphalt Superpave and Quality Assurance/ Quality Control (QA/QC)
- Surface Treatments and Noise, Grind and Groove (GnG) and Open-Graded Friction Course (OGFC)
- Multi-Functional Pavements for Climate Resilience, Urban Environments, and Active Transportation
- Life Cycle Cost Analysis (LCCA)
- Roadway Life Cycle Assessment (LCA)
- Rubberized Asphalt
- Recycled Asphalt Pavement (RAP) and Recycled Asphalt Shingles (RAS)
- Smoothness
- Pavement Management System (PMS)
- New Concepts for Materials and Structures
- New Technologies and Integrated Frameworks

Strategic Planning and Contract Development

The strategic planning and contract development processes involve the following steps:

Caltrans and the UCPRC continually scan for current and future challenges to the department and for potential opportunities—from ongoing communication with all stakeholders; review of work and ideas from outside California; and work the UCPRC does with other federal, state, and local agencies, industry, and other universities.

DRISI and the UCPRC meet with Caltrans domain area stakeholders in the Office of Pavement (Concrete Pavement, Asphalt Pavement, Pavement Management System); Materials Engineering and Testing Services (METS); Construction; Planning; Sustainability; areas such as Asset Management, Traffic Operations, Environmental Analysis, and Aeronautics; and other offices depending on current strategic issues and opportunities. In coordination with the Office of Pavement, DRISI and the UCPRC also visit with district staff working on pavement to discuss the research program, review research results, and listen to needs.

DRISI and the UCPRC meet with industry groups to discuss challenges and needs and brief the Office of Pavement on the discussions.

The UCPRC prepares new Pavement Research Roadmaps as needed and retires and archives research roadmaps whose visions have been completed.

The UCPRC prepares conceptual project ideas for next projects based on the discussions, the updated Pavement Research Roadmaps, and any new Pavement Research Roadmaps.

The UCPRC holds briefings on the updated set of roadmaps and conceptual project ideas with the Office of Pavement in consultation with METS, Construction, and any other interested stakeholders and gets initial feedback. Also discussed are needs for Office of Pavement operations support tasks.

The UCPRC updates the conceptual project ideas and roadmaps and submits them to the Office of Pavement.

The Office of Pavement—with input from other divisions—reviews, comments on, and prioritizes project ideas.

The UCPRC submits updated roadmaps and a prioritized project list to the State Pavement Engineer for approval.

Based on the prioritization and feedback, DRISI and the UCPRC prepare contract documents, including budgets for each project and support task.

If a new challenge or opportunity is identified during the course of the contract by the Office of Pavement or other Caltrans stakeholders and funding is available, DRISI and the UCPRC prepare a new project work plan (and new roadmap, if needed) and submit it to State Pavement Engineer for inclusion in the roadmaps and approval for funding in the contract.

All projects must have a Caltrans "champion" assigned by Caltrans as the technical reviewer for the project or support task. The Caltrans champion is responsible for working with other Caltrans stakeholders, industry, and the UCPRC on preparing for and supporting implementation, in addition to technical review. If a project or support task does not have a champion, it is not funded by DRISI. If circumstances or priorities change and the purpose of the project or support task no longer exists or if the project or support task is no longer of sufficient priority to continue, the project or task is immediately halted by DRISI.

Work Plan Development Process and Documents

Once the contract is in place, the UCPRC prepares a detailed work plan for each project and submits the plan to that project's Caltrans technical reviewer. The technical reviewer solicits comments within Caltrans, which are incorporated into the final detailed work plan. The detailed work plan² includes:

- Background
- Problem statement
- Objectives and tasks
- Scope
- Schedule

The work plan is updated as needed during execution of the project, including review by the Caltrans technical manager. The budget is managed by DRISI and the UCPRC in consultation with the State Pavement Engineer or, for some projects, another Caltrans official who acts as the sponsor for the project or task.

Reporting Processes and Documents

The reporting process includes quarterly reports and specified project deliverables from the UCPRC.

Quarterly Reporting

In addition to periodic technical meetings organized with the technical reviewer and others, the overall progress is reported quarterly in the form of a detailed quarterly report showing progress on scope and spending. The UCPRC submits the quarterly report to DRISI, and DRISI reviews and shares it with the Office of Pavement. Delivery of the quarterly report is followed by quarterly update meetings on all projects with the domain offices in the Office of Pavement and METS, and biannually with the task groups of the Pavement Materials Partnering Committee, comprising Caltrans and industry.

² Available from the UCPRC (contact Camille Fink at cnyfink@ucdavis.edu) and Caltrans DRISI (contact Joe Holland at t.joseph.holland@dot.ca.gov).

Project Deliverables

Periodic meetings are held during projects to present and get feedback and direction regarding interim results. Project reports and technical memoranda move through a formal five-step technical review process led by the Caltrans technical reviewer and the UCPRC project manager and managed by the UCPRC publications manager with DRISI. The technical reviewer solicits additional technical input from within Caltrans and industry as part of the initial steps. The UCPRC then responds to all comments and submits a revised version to Caltrans for final approval before publications. All reports can be accessed through the **UCPRC publications page**, the **DRISI research publications page**, or the **University of California eScholarship website**.

In addition to written documentation of research results, most reports, technical memoranda, and software results are presented at meetings with Caltrans, which sometimes include industry and other stakeholders.

Current Status of Contract

The current PPRC contract began in September 2020 and finishes in September 2023. Strategic planning and preparation of the next contract will begin in the summer of 2022.

Implementation and Research Projects in the PPRC 2020-2023 contract, organized by research area with their Caltrans project IDs (4-digit number) and UCPRC project numbers, are shown in the following section. The following chapter provides details of each project and progress this fiscal year. Summaries of FY 2020-2021 publications are presented in Appendix A.

Mechanistic-Empirical Design

Caltrans committed to replacing historical empirical pavement design methods with mechanisticempirical (ME) methods in 2005. ME methods and design tools are periodically updated to reflect new materials, changes in specifications, new structure types, updates in reliability calculation approaches, policy changes, and changes in climate. They are also periodically recalibrated using improved performance databases from the pavement management system and new statistical techniques. ME simulation is the primary method of evaluating new materials and structures.

CalME Materials Library for Flexible Pavements (3809 | 3.51)

Further Improvement of CalME and Integration with Performance-Related Specifications (PRS) Into Routine Practice (3810 | 3.52)

Rubberized Hot Mix Asphalt-Gap Graded (RHMA-G) Layer Thickness Limits (3760 | 4.75)

New Rubberized Hot Mix Asphalt (RHMA) with Recycled Asphalt Pavement (RAP)/Recycled Asphalt Shingles (RAS) Part A: For Structural Layers in Flexible Pavements (3761 | 4.76A) New Rubberized Hot Mix Asphalt (RHMA) with Recycled Asphalt Pavement (RAP)/Recycled Asphalt Shingles (RAS) Part B: For Interlayers and Base for Rigid Pavements (3977 | 4.76B) Updated Caltrans Rigid Pavement Design Catalog Using Pavement ME (3811 | 3.53) Monitoring Performance of Concrete Overlay Projects (3812 | 3.54)

Performance-Related Specifications

Performance-related specifications use performance-related tests to tie the assumptions regarding materials used in mechanistic-empirical design to the properties that the materials must have when placed in the pavement by the contractor during construction. This requires performance-related tests, specification approaches and limits, and quality control/quality assurance processes.

Asphalt Rubber Binder Specifications (3816 | 4.77)

Recycling

Recycling of existing pavement into new pavement materials and recycling of waste products and coproducts from other supply chains can have economic and environmental benefits—but not always and only if tests, specifications, quality assurance, structural design, and materials design methods are available. To be beneficial, recycling must be safe, produce the same or better life cycle costs, produce the same or better life cycle environmental impacts, be practically feasible at desired scale, and not break the chain of repeated recycling of pavement materials.

Updated Guidance and Specifications for In-Place Recycling (3817 | 4.78)

Guidance, Tests, and Specifications for High Recycled Asphalt Pavement/Recycled Asphalt Shingle Contents in Hot Mix Asphalt (HMA) and Rubberized Hot Mix Asphalt (RHMA) Mixes (3819 | 4.79)

Sustainability

Sustainability considers economic, social, and environmental impacts and ways to reduce or eliminate those impacts. Research includes development of data, methods, and tools for quantifying impacts and use of the information in decision support.

Environmental Life Cycle Analysis (LCA) Updates and Applications (3820 | 4.80)

Implementation of Environmental Life Cycle Assessment (LCA) Data and Models for Project-Level Use in the eLCAP Software (3821 | 3.55) Multi-Criteria Decision Support for Prioritization of Strategies to Reduce Environmental Impacts (3822 | 3.56)

Pavement Management System

The pavement management system is used for decision support in asset management of the Caltrans pavement network. Work in this area includes improvement of data, models, use of results in decision support, and use of the information in life cycle cost analysis.

Tri-Annual Performance Model Update (3814 | 3.57) Continued Calibration of Mechanistic-Empirical Design Models with Pavement Management System Data (3764 | 3.58) Improved Traffic Models for PaveM and Mechanistic-Empirical Design (3765 | 4.81) Potential for Advanced Image Evaluation in Automated Pavement Condition Surveys (APCS) (3766 | 4.82) Updates and Improvements to RealCost-CA (3815 | 3.59)

Support Tasks

Support tasks include tasks that support Caltrans operations (the follow-on to successful implementation for tasks where Caltrans has found it cost efficient to have the UCPRC provide the support) and tasks that support research, development, and implementation projects.

Develop and Manage Partnered Pavement Research Program (3823 | 2.01) Provide Advice to State Government on Pavement Technology (3829 | 2.02) Provide Support for Pavement Management System (PaveM) Operations (3832 | 2.03) Provide Support for CalME, PavementME, and CalBack (3831 | 2.04) Provide Support for eLCAP and RealCost-CA (3779 | 2.05) Maintain Laboratory Testing AASHTO Re:source Certification (3828 | 2.06) Maintain Laboratory and Field-Testing Equipment Capability (3826 | 2.07) Maintain Heavy Vehicle Simulator Equipment (3827 | 2.08) Operate Falling Weight Deflectometer and Profiler Calibration Centers (3825 | 2.09) Update/Maintain Research Support Space (3824 | 2.10) Provide Support to Division of Aeronautics (3780 | 2.11) Conduct Advanced Pavement Research for Long-Term Future Needs (3830 | 2.12)

Mechanistic-Empirical Design



CalME Materials Library for Flexible Pavements

DRISI Project ID: 3809 | UCPRC Project Number: 3.51
Caltrans Technical Lead: Tom Pyle and Raghubar Shrestha, Office of Asphalt Pavement
UCPRC Project Manager: Rongzong Wu

Research Needs

The current *CaIME* Standard Materials Library has limited regional materials and does not adequately cover certain material types listed in *CaIME*, including but not limited to the following:

- Partial-depth recycled materials
- Full-depth recycled materials
- Asphalt mixes with higher recycled asphalt pavement contents
- Dense-graded asphalt materials with small amounts of recycled tire rubber (referred to as PG+X mixes)

The asphalt concrete specimen production procedures for performance-related testing need to be more standardized, and the fatigue life determination of asphalt concrete mixes with polymer- or rubber-modified binders is not well defined following current ASTM or AASHTO test methods. Performance-related test methods require further refinement to be more practical and implementable.

Objective/Goals

This study is a continuation of PPRC Project 3.51 (CalME Materials Library for Flexible Pavements). The objective of this project is to update the Standard Materials Library for *CalME*.

Deliverables

Task 1: Updated strategy for collecting and testing regional materials

 PowerPoint presentation on the development of a strategy for collecting and testing regional materials

Task 2: Material sampling and testing

- Updated *CaIME* Standard Materials Library
- Technical memorandum summarizing the materials tested

Task 3: Development of an asphalt concrete specimen production procedure

 Technical memorandum describing the standard test procedure for producing asphalt concrete specimens for performance testing for use in performance-related specifications

Task 4:Development of fatigue testing procedures for polymer- and rubber-modified
mixes

 Technical memorandum describing the procedure for evaluating fatigue performance of asphalt concrete mixes with polymer- or rubber-modified binders

Task 5:Refinement of new performance testing methods for asphalt binder, fine
aggregate matrix mixes, and asphalt concrete mixes

- Technical memorandum summarizing the recommendations for various performance tests
- Draft of new or updated test methods

Task 6: Preparation of project reports

- Internal laboratory database tracking the production, testing, and analysis
- Quarterly presentation to Caltrans regarding research progress
- Technical memoranda listed in Tasks 2, 3, 4, and 5, and new and updated test methods from Task 5

Summary of Progress FY 2020-2021

Some gaps in the current Standard Materials Library have been identified, such as polymer-modified mixes and mixes with PG 70 binders. Most of the backlog of testing for materials sampled in the last contract has been completed. The sampling and testing of new mixes, including the Interstate 5 Sacramento AC Long Life project mixes, have started. The evaluation of a new compaction device as an alternative to the rolling wheel compactor has started as well as the development of procedures to address the aging effects on performance test results in pavement design, job mix formula approval, and quality control/quality assurance settings. A literature review of various fatigue life determination processes is complete, and a potential procedure has been proposed for use in polymer and rubber-modified mixes testing. A report on surrogate tests for asphalt mix fatigue and fatigue performance is undergoing review.

Further Improvement of CalME and Integration with Performance-Related Specifications (PRS) Into Routine Practice

DRISI Project ID: 3810 | UCPRC Project Number: 3.52 Caltrans Technical Lead: Tom Pyle and Raghubar Shrestha, Office of Asphalt Pavement UCPRC Project Manager: Rongzong Wu

Research Needs

New features that can significantly improve *CalME* in terms of design workflow and efficiency have been identified and need to be developed and/or implemented. Some models in *CalME*, such as the aging model for asphalt materials, and consideration of the effects of wandering on pavement rutting need to be further improved. Some additional pavement behavior parameters need to be modeled in *CalME*, such as the effects of moisture on the mechanical properties of unbound and partially bound layers. Consideration and use of the significant amount of new accelerated pavement testing data collected in recent years is needed to improve the damage models used in *CalME*. These tests cover topics such as recycled asphalt pavement in rubberized hot mix asphalt-gap graded (RHMA-G) mixes, thicker RHMA-G layers, alternative RHMA-G mixes, full-depth reclamation materials, and cold central plant recycling materials. Performance tests need to be further refined and improved for more practical use in *CalME* designs and construction specifications. Finally, there is no centralized database that integrates both performance test data and mix volumetrics for Caltrans highway construction projects.

Objective/Goals

This study is a continuation of PPRC Project 3.41 (M-E Algorithms and Field Calibrations). The objective of this project is to deliver updated *CalME* software to Caltrans.

Deliverables

Task 1: Development/implementation of new CaIME features

- Quarterly PowerPoint presentations to update Caltrans on progress of the new features
- Online documentation on how to use these new features

Task 2: Updated and new *CalME* models

- Quarterly PowerPoint presentations to update Caltrans on progress of model updates
- Implementation of the new models in CaIME
- Online documentation on how to use these updated or new models

Task 3: Calibration of CaIME damage models with recently collected data

• Technical memorandum on data cleaning, model selection, and calibration

Task 4: Updated performance tests for design and construction

• Technical memorandum detailing updated specimen preparation performance tests for developing *CalME* design inputs, performance tests for performance-related construction specifications, and a summary of performance test data collected from AC Long Life and performance-related specifications projects

Task 5:Integration of CaIME and Caltrans Data Interchange for Materials Engineering
(DIME) database

 Technical memorandum on recommended procedures for incorporating performance test results into Caltrans Materials Engineering and Testing Services (METS) and district materials laboratory operations and loading of results into the DIME database

Task 6: Preparation of project documentation

- Quarterly presentation to Caltrans regarding research progress
- Technical memoranda listed in Task 3, 4, and 5

Summary of Progress FY 2020-2021

New features to add to *CaIME*—such as maintenance and rehabilitation schedules, automatic design, and integration with site investigation—have been identified. An initial guess button has been added to provide a rough design for given traffic, climate, and subgrade. Models for cemented materials have been updated. Some recycled materials (FDR-FA and FDR-C) damage models have been updated using Heavy Vehicle Simulator test results. This project supported the Interstate 5 Sacramento AC Long Life project on job mix formula approval and quality control/quality assurance testing and provided a summary on correlations between volumetrics and performance test results. An initial meeting was held with the DIME team about potential integrations between *CaIME* and *PaveM*.

Rubberized Hot Mix Asphalt-Gap Graded (RHMA-G) Layer Thickness Limits

DRISI Project ID: 3760 | UCPRC Project Number: 4.75 Caltrans Technical Lead: Tom Pyle and Raghubar Shrestha, Office of Asphalt Pavement UCPRC Project Manager: David Jones

Research Needs

The decision criteria for thickness limits of rubberized hot mix asphalt-gap graded (RHMA-G) layers whether 1/2 in. nominal maximum aggregate size mixes can be used in 0.2 ft thick layers and whether RHMA-G layers can be used in layers other than surface layers—are dated. These criteria need to be updated based on life cycle cost analysis, environmental life cycle assessment, and expected performance based on mechanistic-empirical design simulations using *CalME*.

Objective/Goals

This study is a continuation of PPRC Project 4.63 (Performance-Related Specifications for Rubberized Asphalt Binder). The objective of this project is to develop updated criteria for determining thickness limits of RHMA-G layers and whether RHMA-G layers can be used in layers other than surface layers.

Deliverables

if justified

Task 1:	Heavy Vehicle Simulator (HVS) and associated laboratory testing of
	RHMA-G mixes
	• Research report covering first-level analysis of HVS and associated laboratory testing
Task 2:	CaIME simulations using data collected during Task 1
	 PowerPoint presentation of Task 2 results
Task 3:	Revision of life cycle cost analysis and life cycle assessment information for
	RHMA-G applications and case study evaluations of the effects of implementing
	preliminary recommendations
	 PowerPoint presentation of Task 3 results
Task 4:	Research report and recommendations for updated Highway Design Manual
	language for RHMA-G design and use criteria
	• Research report documenting work done in Task 2 and Task 3 with recommendations
	for updated Highway Design Manual language for RHMA-G design and use criteria,

Summary of Progress FY 2020-2021

This project is behind schedule due to delays caused by breakdowns of the two HVS machines and problems with obtaining spare parts that originate in Europe, where manufacturers and suppliers have had extended shutdowns due to COVID-19. HVS testing on three of the seven sections (Task 1) was completed and a first-level analysis report of the results was prepared, reviewed, and finalized. Laboratory characterization testing on plant mixed, laboratory-compacted specimens for each of the four mixes was completed. Periodic dynamic modulus testing on cores removed from the track is in progress to track aging of the mixes. Preliminary findings from the HVS testing have shown that performance of the three mixes was satisfactory in terms of the level of trafficking required to reach a terminal average maximum rut of 0.5 in., no significant damage was caused by the loading, and blending of the recycled asphalt pavement binder may have stiffened the mix. No work can be started on Tasks 2 and 3 until HVS testing has been completed.

New Rubberized Hot Mix Asphalt (RHMA) with Recycled Asphalt Pavement (RAP)/ Recycled Asphalt Shingles (RAS) Part A: For Structural Layers in Flexible Pavements

DRISI Project ID: 3761 | UCPRC Project Number: 4.76A Caltrans Technical Lead: Raghubar Shresthra, Office of Asphalt Pavement UCPRC Project Manager: Mohamad Elkashef (to August 15, 2021) and John Harvey

Research Needs

Previous research has shown that rubberized binders age at a slower rate than conventional binders. The effects of aging on rubberized binders and rubberized hot mix asphalt-gap graded (RHMA-G) and other RHMA mixes containing both fine- and coarse-graded recycled asphalt pavement (RAP) are not fully understood and need to be investigated. The performance of RHMA-G and other RHMA mixes produced with fine RAP (binder replacement is likely), coarse RAP (binder replacement is unlikely), recycled asphalt shingles (RAS), or RAP with RAS in different structural layers within different types of flexible pavement structures needs to be assessed in the laboratory and with mechanistic-empirical analysis. Whether rich bottom layers age deep in the pavement is of particular interest.

If RHMA-G layers and potentially RHMA layers with other gradations—with RAP, RAS, or RAP with RAS—used within pavement structures appear to result in a notable improvement in performance and pavement life, validation and calibration of results using accelerated pavement testing should be considered. For those applications that appear promising, guidance needs to be developed regarding how and where to use RHMA with and without RAP and/or RAS beyond current applications and an initial framework of properties and tests for use in performance-related specifications.

Objective/Goals

This research is a continuation of two previous CalRecycle-funded studies to investigate the use of RAP in RHMA. The objective of this phase of the study is to develop guidance on the use of RHMA (gap and other gradation) mixes containing RAP, RAS, or RAP with RAS in pavement structures, with special focus on use in structural layers, including rich bottom layers, in flexible pavements.

Deliverables

Task A.1: Updated literature review to include recently completed research

- PowerPoint presentation on the literature review results
- Summary of the literature review to be included in the research report prepared after completion of Task A.4
- Task A.2: Initial CaIME simulations in various structural layer applications in flexible pavements
 - PowerPoint presentation on the results of the initial simulations and how they will be used to refine the Task A.3 laboratory testing plan
- Task A.3: Laboratory testing of RHMA mixes with fine and coarse RAP, RAS, or RAP with RAS
 - PowerPoint presentation on Task A.3 results
 - Laboratory test results and analysis to be included in the research report prepared after completion of Task A.4

Task A.4: Refined *CaIME* simulations using RHMA with RAP, RAS, or RAP with RAS in various structural layer applications in flexible pavements

- Research report documenting the findings from Tasks A.1 through A.4 with recommendations for further validation and calibration of results from the study if warranted, including pilot studies and/or Heavy Vehicle Simulator (HVS) testing to calibrate and verify the mechanistic simulations conducted in this task
- If justified, interim recommended language for the *Highway Design Manual* and for non-standard specifications covering the use of RHMA layers containing RAP, RAS, or RAP with RAS in structural layers
- Interim framework for the development of performance-related specifications for RHMA mixes containing RAP, RAS, or RAP with RAS for each application

Task A.5: If results from the first four tasks warrant, pilot studies and/or HVS testing to verify simulations

- Research report documenting pilot study and/or test track design and construction and pilot study and/or HVS test results and first-level analysis
- Updated *CaIME* models
- Updated recommended language for the *Highway Design Manual* and for non-standard specifications covering the use of RHMA layers containing RAP, RAS, or RAP with RAS in structural layers in flexible pavements
- Updated framework for the development of performance-related specifications for RHMA layers containing RAP, RAS, or RAP with RAS

Summary of Progress FY 2020-2021

The literature review has been continually updated. Significant progress has been made this year on the laboratory testing of RHMA mixes with fine and coarse RAP and RAS. Some initial *CalME* simulations have been made using materials with different amounts of RAP versus conventional mixes and RHMA-G mixes. Additional simulations will be done once laboratory testing is completed.

New Rubberized Hot Mix Asphalt (RHMA) with Recycled Asphalt Pavement (RAP)/ Recycled Asphalt Shingles (RAS) Part B: For Interlayers and Base for Rigid Pavements

DRISI Project ID: 3977 | UCPRC Project Number: 4.76B Caltrans Technical Lead: Deepak Maskey, Office of Concrete Pavement UCPRC Project Manager: Angel Mateos

Research Needs

Asphalt bases currently being used under concrete are optimized for use as asphalt pavement surface layers, not as a base for concrete. Also, while the use of lean concrete base (LCB) presents some economic and ambient advantages compared to hot mix asphalt (HMA) bases, jointed plain concrete pavement (JPCP) performs worse with LCB than with HMA bases in terms of cracking. There is little knowledge about the mechanical properties that an asphalt mix should have to constitute a good base for a concrete pavement. In particular, no validated tests exist to evaluate the performance of an asphaltic material as a base for concrete pavement. There is also little knowledge about the interaction between the JPCP slab and its base. The simplistic conception of this problem in current mechanistic-empirical design methods fails to reproduce observed performance. While the use of rubberized hot mix asphalt shingles (RAS), or RAP with RAS—as a base for concrete pavement may provide technical, economic, and ambient benefits.

Objective/Goals

The objective of Part B of PPRC Project 4.76 is to develop guidance on the use of RHMA mixes—with or without RAP, RAS, or RAP with RAS—as a base for rigid pavements and as a very thin interlayer between LCB and JPCP.

Deliverables

Task B.1: Completion of literature review

- PowerPoint presentation on the literature review results
- Summary of the literature review to be included in the research report prepared after completion of Task B.4

Task B.2: Laboratory testing of RHMA-G as JPCP base or JPCP slab-LCB interlayer

- PowerPoint presentation about Task B.2 results
- Laboratory test results and analysis to be included in the research report prepared after completion of Task B.4

Task B.3: Field evaluation of JPCP slab-base interaction

- PowerPoint presentation about Task B.3 results
- Field evaluation results and analysis to be included in the research report prepared after completion of Task B.4

Task B.4: Preparation of research report

- Research report detailing the study and including a set of performance-related tests and their corresponding performance limits to evaluate asphalt materials as a base or slab-base interlayer for JPCP
- Updated recommended language for the *Highway Design Manual* and for non-standard specifications covering the use of RHMA—with and without RAP, RAS, or RAP with RAS as a base for rigid pavements and the use of engineered interlayers between LCB and JPCP

Summary of Progress FY 2020-2021

Different alternative materials have been explored as an asphaltic base of jointed plain concrete pavement and continuously reinforced concrete pavement and as an interlayer ("bond breaker") between the concrete pavement and LCB. The materials explored as asphaltic base include RHMA-G and rubberized hot mix asphalt-dense (RHMA-D), both with RAP. As interlayer materials, geotextile and microsurfacing have been explored. Several meetings have been held with the materials producers and several materials have been sampled for laboratory testing. Part of this project has focused on the development of a testing procedure that can be used to evaluate the suitability of a material as an asphaltic base of a concrete pavement or as an interlayer between the concrete pavement and LCB. A finite-element model is being developed as well.

Updated Caltrans Rigid Pavement Design Catalog Using Pavement ME

DRISI Project ID: 3811 | UCPRC Project Number: 3.53 Caltrans Technical Lead: Dulce Rufino Feldman, Office of Concrete Pavement UCPRC Project Manager: Angel Mateos

Research Needs

The concrete pavement design catalog in the current Caltrans *Highway Design Manual* was implemented in 2007. The jointed plain concrete pavement (JPCP) catalog tables are based on calculations conducted with *Mechanistic-Empirical Pavement Design Guide* (version 0.8) in 2005 and 2006 and later adjustments based on design catalogs from other states. The tables do not acknowledge the changes that the AASHTO mechanistic-empirical design method (*MEPDG* in the past, *Pavement ME* now) has undergone over the past 15 years or the validation, calibration, and catalog development efforts conducted as part of PPRC Project 3.49 (Implement Concrete ME Design Tools). In addition, the current *Highway Design Manual* concrete pavement design catalog does not include concrete overlay on asphalt (COA), and the continuously reinforced concrete pavement (CRCP) thickness values have not been updated since the 2007 implementation.

Objective/Goals

The primary goal of Project 3.53 is to develop and implement a new *Highway Design Manual* concrete pavement design catalog using *Pavement ME* (version 2.5.5). This research will consider climate, traffic, materials, design, and construction practices and standards applicable to the Caltrans road network.

Deliverables

- Task 1: Finalized JPCP design catalog tables

 JPCP design catalog tables

 Task 2: Finalized COA design catalog tables

 COA design catalog tables
 COA design catalog tables

 Task 3: Development of CRCP design catalog tables

 CRCP design catalog tables
- Task 4: Implementation of design catalog tables in a web-based tool
 - Online catalog and documentation

Summary of Progress FY 2020-2021

The design tables of thin COA and regular JPCP have been prepared. The tables consider the different COA and JPCP structures that are expected to perform properly on the Caltrans road network. Summary reports have been produced for both COA and JPCP outlining the hypothesis and design values adopted in *Pavement ME* to develop the design tables. The tables were developed using *Pavement ME* (version 2.5.5) with the nationally calibrated cracking models. The JPCP sections were also verified in terms of faulting and the International Roughness Index. The development of the CRCP design tables is pending. A database was created with the *Pavement ME* outputs required to run a web version of the design catalog. The mechanistic-empirical algorithms required to run the web catalog have been formulated and included in the two reports. The functionality of the web catalog has been drafted and sent to Caltrans for review.

Monitoring Performance of Concrete Overlay Projects

DRISI Project ID: 3812 | UCPRC Project Number: 3.54
 Caltrans Technical Lead: Dulce Rufino Feldman, Office of Concrete Pavement
 UCPRC Project Manager: Angel Mateos

Research Needs

While concrete overlay on asphalt (COA) and concrete overlay on concrete (COC) can be regarded as mature technologies, their increasing use results in the need to evaluate their performance, optimize their design, and potentially improve their construction. The relevance of concrete overlays is emphasized by the Targeted Overlay Pavement Solutions (TOPS) initiative launched by the Federal Highway Administration's Every Day Counts program (EDC-6) for the 2021-2022 cycle.

Although the performance of most concrete overlay alternatives is not very different from the performance of standard jointed plain concrete pavement (JPCP) or continuously reinforced concrete pavement (CRCP), a number of factors and phenomena deserve special study, including the reduced slab thickness of some concrete overlay alternatives, the interaction between the concrete overlay and the existing pavement, and the risk of distresses that result from the bottom-up propagation of the distresses in the existing pavement. From the construction point of view, one of the main differences between concrete overlay and regular JPCP and CRCP are the preparation of the existing asphalt or concrete surface prior to placing the concrete overlay and the possible use of an interlayer between the concrete overlay and the existing surface. The study of COA with short transverse joint spacing deserves special attention since this rehabilitation alternative is relatively new to the Caltrans road network and has mostly been used in colder, wetter climates than California that experience much less drying shrinkage.

Objective/Goals

The primary goal of Project 3.54 is to develop guidance for COA design and construction in California. This goal is be achieved through the evaluation of concrete overlay projects to determine performance under different climate, traffic, and existing site conditions and identification of current best and improved practices and standards applicable to California's climate, materials, and construction work zone practices.

Deliverables

Task 1: Continued monitoring of the State Route 113 COA pilot project

- Summary of updated observations on the early performance of the State Route 113 COA pilot project to be included in the final project report
- Task 2:Evaluation of the condition of concrete overlay projects in California• Summary of observations that will be included in the final project report
- Task 3:Monitoring of the construction and initial performance of new concrete
overlay projects
 - Construction report for each project
- Task 4:Preparation of research report
 - Final research report

Summary of Progress FY 2020-2021

The monitoring of the Caltrans thin COA pilot on State Route 113 in Woodland has continued. The monitoring began during the construction of the pilot in October 2018. The monitoring includes continuous measurement of concrete temperature and strain with embedded sensors, periodic evaluation of the smoothness and surface texture, and occasional evaluation of the structural response under traffic loading. A report detailing the initial performance of the project to September 2020 has been produced. Support to Caltrans for the EDC-6 TOPS initiative is included in this research project. The performance of a list of COA and COC projects identified by Caltrans is being analyzed. The analysis is based on pavement management system data, and the main outcome of the initial part of the research is the development of the software code required to query the data and summarize the data in an appropriate format.

Performance-Related Specifications



Asphalt Rubber Binder Specifications

DRISI Project ID: 3816 | UCPRC Project Number: 4.77 Caltrans Technical Lead: Tom Pyle and Kee Foo, Office of Asphalt Pavement UCPRC Project Manager: David Jones

Research Needs

Precision and bias statements need to be developed for the recommended performance grading (PG) testing procedures to make the PG binder specification applicable to asphalt rubber. Base binder selection criteria for asphalt rubber binders need to be reviewed, especially for inland valley and desert applications. New developments in fine rubber preparation and pelletizing of rubber particles to improve digestion need to be reviewed and recommendations made for their use in California, if applicable. Binders made with these products will typically meet Caltrans performance grading-modified (PG-M) specifications (except for solubility) and can be considered for wider use in dense-graded mixes where *CaIME* evaluations indicate potential benefits.

Objective/Goals

This study is a continuation of PPRC Project 4.45 and Projects 4.50/4.63 (Performance-Related Specifications for Rubberized Asphalt Binder). The objective of this project is to finalize PG testing procedures for asphalt rubber binders.

Deliverables

Task 1:Completion of outstanding testing on field-produced binders, delayed because of
COVID-19 restrictions, and finalized draft PG testing method

- Research report detailing Phase 3 PG testing of asphalt rubber binders
- Updated proposed draft of PG testing procedure for asphalt rubber binders
- Provisional PG map for asphalt rubber binders
- Task 2:Preparation and implementation of statewide round robin study to develop
precision and bias statements for the proposed PG testing procedure
 - Technical memorandum documenting the design, analysis, and results of the round robin study
 - Provisional precision and bias statements for PG testing of asphalt rubber binders

Task 3:Review and, if appropriate, updating of base binder selection criteria for
asphalt rubber binders

- Technical memorandum documenting the findings of the review
- If laboratory testing is justified, research report documenting laboratory testing with recommendations for revising base binder selection procedures

Task 4:Investigation of use of fine dry rubber and polymerized/pelletized, soluble
rubber for use in asphalt mixes, primarily dense graded

- Technical memorandum documenting results of the literature review and *CaIME* simulations
- If further laboratory testing is justified, research report documenting laboratory testing with recommendations for implementation in pilot studies

Summary of Progress FY 2020-2021

Task 1 of this project is nearing completion. Research focused on the testing of binders after larger, incompletely digested rubber particles had been removed using a simple centrifuging process. Earlier phases of the study had determined that these incompletely digested particles were influencing the test results and leading to unrealistically high PGs. Results for the binders with larger particles removed appear to be consistent with expected performance. Work on Task 2, if required by Caltrans, cannot be started until Task 1 has been completed and the testing approach is provisionally adopted by Caltrans. As results become available, they are being analyzed in terms of preparing recommended base binder and asphalt rubber binder PG maps for the different climatic regions of California (Task 3). The literature on and testing of fine, dry rubber and polymerized/pelletized, soluble rubber in asphalt rubber binder applications continues, but no testing of these binders will be undertaken unless directed by Caltrans.

Recycling



Updated Guidance and Specifications for In-Place Recycling

DRISI Project ID: 3817 | UCPRC Project Number: 4.78
 Caltrans Technical Lead: Allen King and Tom Pyle, Office of Asphalt Pavement
 UCPRC Project Manager: David Jones

Research Needs

The following problem statements are still outstanding or require refinement/calibration for California conditions:

- Mechanistic-empirical parameters for in-place recycling (IPR) projects need to be finalized.
- Consistent mix design procedures for all IPR strategies need to be developed and laboratory
 performance testing needs to be done to refine mechanistic-empirical design and performance
 modeling parameters. Mix design procedures should include raveling tests, given that recycled
 layers are exposed to traffic for up to 15 days before the asphalt surfacing is placed.
- Partial-depth recycling (PDR) and cold central plant recycling (CCPR) materials produced with only recycled asphalt pavement typically have coarse gradations, which leads to compacted layers having relatively high air-void contents. The use of supplemental fines to improve gradations needs to be investigated. Use of fines derived from forest waste biomass materials should also be considered.
- Time limits for stockpiling of CCPR materials need to be established.
- The effects on construction and performance of rubberized hot mix asphalt and fabrics in the recycled layer are not fully understood and need to be further evaluated.
- Current PDR construction techniques are not conducive to the application of tack coats between the recycled and underlying layers. Consequently, debonding of these two layers is often observed in cores removed from the pavement. Recent developments in spray pavers need to be assessed to see if this equipment can be effectively used in PDR applications to improve long-term performance.
- The long-term performance of deep-lift full-depth recycling (FDR-C) projects has not been quantified. Although this strategy is being used on city and county roads with reported success, to date there are no published studies documenting longer-term performance on roads carrying traffic volumes typical of those on Caltrans roads where FDR-C may be considered. Concerns regarding the compaction of thicker layers on weak/moist subgrades, the potential for cracking resulting from drying shrinkage and/or differential compaction over the thickness of the layer, and the applicability of shrinkage crack mitigation of these thicker layers need to be investigated.

- The use of rejuvenating agents and other stabilizers (e.g., synthetic polymer emulsions) has not been investigated in IPR projects to date.
- Preliminary international research on the use of nano-stabilizers to improve emulsified asphalt performance in recycled layers has shown promising early results and warrants further investigation.
- Preliminary national research on the use of geosynthetics between subgrades and recycled layers and between recycled layers and asphalt concrete surfacings has also shown positive results, especially in the former application where the recycled layer material is processed through a cold central plant. The use of geosynthetics provides a potential alternative to subgrade stabilization and/or can provide a barrier to prevent fines contaminating the recycled layer. Geosynthetics between an FDR-C layer and the asphalt concrete surface may limit shrinkage cracks in the FDR-C layer from reflecting through the asphalt.
- Guidance has not been developed to identify when in-place recycling of material that is
 primarily subgrade soils, as opposed to primarily recycled asphalt concrete and aggregate
 base, should be modeled and designed as FDR and when it should be modeled and designed
 as stabilized subgrade or subbase.

Objective/Goals

This study is a continuation of PPRC Projects 4.65 (FDR Microcracking), 4.69 (FDR Emulsion and Field), and 4.70 (PDR Guidance). The objective of this project is to update guidance and mechanistic-empirical design procedures for in-place recycling.

Deliverables

- Task 1:Continued long-term monitoring of existing and new field IPR pilot projects to
assess stiffness, cracking, rutting/densification, freeze-thaw, moisture
sensitivity, and other observed distresses
 - Updated list of IPR projects evaluated/suitable for future evaluations
 - Database of observations and measurements for CaIME modeling
 - Summary of observations and measurements from field monitoring, with recommendations for updating IPR guidance and *CaIME* models and for adopting NCHRP 9-62 guality control/quality assurance procedures

Task 2:Completion of Heavy Vehicle Simulator (HVS) and associated laboratory testing
to assess mechanistic behavior and performance properties of CCPR materials

 Research report documenting HVS testing, with recommendations for updating IPR guidance and CaIME models

Task 3: Literature reviews and laboratory testing to refine mix design procedures

• Research report documenting laboratory testing, with recommendations for updating IPR guidance and *CaIME* models

Task 4: Field monitoring and associated laboratory testing of deep-lift FDR-C projects

• Research report documenting task findings, with recommendations for updating IPR guidance, relevant *Highway Design Manual* chapters, and *CalME* models

Task 5: Updated guidance, CalME models, and CalME materials library

- Updated IPR guidance
- Updated *CaIME* models and materials library
- Revised Highway Design Manual and specification language, if applicable
- High-level summary report documenting IPR research undertaken by the UCPRC since 2008

Summary of Progress FY 2020-2021

Progress on all tasks is on schedule. Field projects (Task 1, construction and long-term performance) continue to be monitored, with specific focus on projects where procedures are being adapted for specific circumstances. HVS testing of CCPR materials (Task 2) was delayed. However, testing on two sections (one with asphaltic emulsion and one with foamed asphalt) was completed in the review period. Satisfactory performance was observed on both sections. Laboratory testing (Task 3) continued according to the work plan, with primary focus during this review period on adding supplemental fines to PDR and CCRP projects to improve gradation and, as a result, reduce air-void content and improve strength and raveling resistance. Specimens cored from the test track at periodic intervals have also been tested for dynamic modulus to track aging of recycled layers. The expected behavior of deep-lift FDR pavements stabilized with cement (Task 4) was modeled, with initial findings indicating that shrinkage cracking is likely if full compaction and pre-cracking (i.e., microcracking) to the bottom of the layer are not achieved. Field projects are being sought to assess these findings. A new, comprehensive guideline on IPR was published, and the UCPRC participated in statewide training on IPR.

Guidance, Tests, and Specifications for High Recycled Asphalt Pavement/ Recycled Asphalt Shingle Contents in Hot Mix Asphalt (HMA) and Rubberized Hot Mix Asphalt (RHMA) Mixes

DRISI Project ID: 3819 | UCPRC Project Number: 4.79
 Caltrans Technical Lead: Allen King, Office of Asphalt Pavement
 UCPRC Project Manager: Mohamad Elkashef (to August 15, 2021) and John Harvey

Research Needs

The degree of blending between recycled asphalt pavement (RAP), RAP/recycled asphalt shingles (RAS), and virgin binders could be significant, particularly for mixes using highly aged RAP and RAS, typical of inland valley scenarios. Incomplete blending could alter the properties of the mix because of less available binder and partial activation of the stiff RAP and/or RAS binder. Plant-produced mixes subjected to silo storage undergo additional blending and aging leading to increased stiffness, improved rutting, and reduced cracking and fatigue resistance. This incomplete and additional blending needs to be better understood for consideration in mix design procedures and performance-related testing. The impact of long-term aging on the performance of high RAP and RAP/RAS mixes with different rejuvenators needs to be fully investigated using various aging protocols.

Objective/Goals

This study is a continuation of PPRC Project 4.64 (Continued Development of Guidelines for Determining Binder Replacement in High RAP/RAS Content Mixes). The objective of this project is to develop guidelines for determining binder replacement rates in high RAP/RAS content mixes without the need for binder extraction and performance-related tests for use in routine mix design and construction quality control/quality assurance.

Deliverables

Task 1: Updated literature review to include recently completed research

PowerPoint presentation on updated literature review

Task 2:	Testing of high RAP and RAP/RAS mixes to determine their performance properties
	 PowerPoint presentation on high RAP and RAP/RAS testing findings
Task 3:	Testing of extracted and recovered RAP, RAP/RAS, and RAP/RAS/virgin binder
	blends to assess the effectiveness of different rejuvenators
	 PowerPoint presentation on RAP, RAP/RAS, and RAP/RAS/virgin binder blend testing findings
Task 4:	Complete investigation into the use of fine aggregate matrix (FAM) mix testing
	to assess the fatigue performance of mixes and to predict binder properties
	 PowerPoint presentation on FAM mix testing findings
Task 5:	Investigation of long-term aging effects of high RAP and RAP/RAS mixes using
	different laboratory-aging protocols
	 PowerPoint presentation on high RAP and RAP/RAS mix test findings
Task 6:	Monitoring of field performance of high RAP and RAP/RAS mixes and use results
	to evaluate laboratory-aging protocols
	• PowerPoint presentation on monitoring of field performance of RAP and RAP/RAS mixes
Task 7:	Preparation of research report with recommendations for use of RAP and
	RAP/RAS as binder replacement, and, if applicable, recommendations for
	accelerated wheel load testing
	 Report documenting research findings
	 Recommendations for accelerated pavement testing of select RAP and RAP/RAS mixes, if justified

Summary of Progress FY 2020-2021

Periodic updates have been made, including review of the literature and discussions with other researchers working in this area. Considerable progress has been made on the testing of high RAP and RAP/RAS mixes, and this testing will continue. Binders are being extracted from selected mixes to understand the contribution of binders to mix performance. A draft report has been completed showing the efficacy of using FAM in place of mix testing, and the preliminary recommendation is to continue progress with this promising test. Partial results have been collected on long-term aging, particularly a study that looked at mix properties for four high RAP mixes with zero hours of aging in the storage silo at the asphalt plant compared to 5 to 16 hours of silo time. The results showed significant differences, which varied depending on the mix. The mixes had different RAP sources and RAP contents, and some included rejuvenating agents. These and other results indicate that the overall mix properties are affected by aging of the virgin binder, diffusion of the aged RAP binder with the virgin binder, and aging of the rejuvenating agents. Plans have been developed for monitoring of a RAP and RAS pilot on El Dorado State Route 49.

Sustainability



Environmental Life Cycle Analysis (LCA) Updates and Applications

DRISI Project ID: 3820 | UCPRC Project Number: 4.80 Caltrans Technical Lead: Deepak Maskey, Office of Concrete Pavement UCPRC Project Manager: Ali Butt

Research Needs

This project will expand, improve, and update the capabilities of Caltrans to address current and future issues required to meet the California Global Warming Solutions Act of 2006 (AB 32) greenhouse gas emission targets and category pollutant regulations and to conduct more informed decision-making with respect to environmental, energy, and resource use impacts using life cycle analysis (LCA). A triennial update of existing life cycle inventory (LCI) databases using updated data from the government and other sources is needed. Industry-submitted environmental product declarations (EPDs) need further study for their potential use in LCA tools and for procurement as Caltrans receives them in its EPD implementation pilot project. Additional and improved data and algorithms for LCA for the range of design, construction, maintenance, and rehabilitation strategies used in California-including technology changes such as new materials production, construction equipment, and pavement structures-need to be developed. The ability to perform LCA at the conceptual design stage of project development and to consider roadway structures, such as culverts, drainage, standard highway bridge materials, construction, maintenance, and end-of-life, in addition to pavement, is needed. Updated and new LCIs need to be sent for external critical review of assumptions, data, models, and results. LCA procedures for considering uncertainty of data and models for application in California need to be improved.

Objective/Goals

This study is a continuation of PPRC Project 4.66 (Environmental Life Cycle Assessment Updates and Applications). The objective of this project is to continue updating and applying environmental LCA procedures for improving the sustainability of roadway operations in California.

Deliverables

Task 1: Updating of LCA with new material inventories

- Improved LCA capabilities in terms of data, models, and procedures
- Technical memorandum on LCI of newly inventoried materials
- Technical memorandum on evaluation of data from Caltrans EPD program

Task 2:Development and finalizing of models to be implemented in *eLCAP* and in
simplified form in *PaveM*

- Technical memorandum on use stage models (roughness, structural response, speed effects, electric vehicles)
- Technical memorandum on other life cycle stage models (construction work zone, materials and construction, end-of-life)
- Task 3: Critical review of inventories and models
 - Completed critical review
 - Updated technical memoranda from Task 2

Task 4: Information and data for implementation of models in tools

- Information and data ready for updates in *eLCAP*
- Information and data ready for updates in PaveM

Summary of Progress FY 2020-2021

The life cycle models and data for the material and construction stages and transportation from 2019 and 2020 have been updated. Modeling of Caltrans construction practices and California equipment emissions data was also updated. The LCI report was updated and submitted to the contracted critical review panel of three international experts. The review panel comments were received in June 2020, and the inventories are being updated based on the reviewer comments. A detailed literature review on the effect of pavements on electric vehicles and their batteries was also performed. Some of the reports from the previous contract were also completed and submitted to Caltrans, including the pavement structural response empirical modeling report, the Caltrans EPD pilot project study report, and the construction work zone modeling report. Updating of the life cycle models and data will continue so that they can be implemented in the Caltrans pavement LCA tool (*eLCAP*).

Implementation of Environmental Life Cycle Assessment (LCA) Data and Models for Project-Level Use in the eLCAP Software

DRISI Project ID: 3821 | UCPRC Project Number: 3.55
 Caltrans Technical Lead: Deepak Maskey, Office of Concrete Pavement
 UCPRC Project Manager: Ali Butt and Jon Lea (to June 29, 2021)

Research Needs

Caltrans personnel—working on project delivery from conceptual design through complete design; evaluation and improvement of specifications, guidance, and policy development; and reporting of emissions—do not currently have a comprehensive project-level tool for full-system life cycle assessment. There are existing spreadsheets and consultant reports for elements of the design stage, such as particular materials and construction. These tools have been intermittently updated, and some do not have documentation that permits the analyst to understand important assumptions, calculations, and data sources. Furthermore, in many cases the data used in these tools have not been reviewed and adjusted where necessary to match local conditions.

Objective/Goals

This study is a continuation of PPRC Project 3.46 (Environmental Life Cycle Assessment Pavement: Tool for Project-Level Use). The objective of this project is to continue the development of a webbased online life cycle assessment (LCA) pavement tool that uses energy and material datasets specific to California and follows the construction practices of Caltrans. It will use other updates developed by the UCPRC for Caltrans in the previous contract projects (Project 4.66: Environmental Life Cycle Assessment Updates and Applications; Project 4.73: Fast Model Energy Consumption Structural Response) and the companion project in the current contract (Project 4.80: Environmental LCA Updates and Applications). The tool will be consistent with the Federal Highway Administration (FHWA) Pavement Life Cycle Assessment Framework and the work of federal agencies (including FHWA) in the Federal Commons initiative.

The data and procedures in *eLCAP* will be updated for use at the conceptual-level design and projectlevel design stages. User interfaces based on user feedback will also be updated along with documentation for the tool. The compatibility of greenhouse gas emissions and other calculations in *PaveM* will be updated in *eLCAP*. The work will include an outside critical review of the tool itself (the inventories and models will be subject to a formal outside critical review as part of Project 4.80).

Deliverables

Task 1: Updating of *eLCAP* with updated and new models at every pavement life cycle stage

- Implementation of updates
- Updated inventory libraries
- Documentation of all the updates in eLCAP

Task 2: Implementation of conceptual design-level module for roadway analysis

- Incorporation of roadway elements and ability to use them at early stages of design in *eLCAP*
- Documentation with capability for analysis of policy, conceptual designs, and final designs

Task 3: Updated user interface and system requirements

- User and system requirement document
- Set of use cases
- User interface, report, and graph mockup documents

Task 4: Implementation, including UCPRC and Caltrans unit testing and review

- Online help system
- Results of UCPRC testing
- Results of Caltrans testing
- Results of regression testing

Task 5: Critical review

- Identification of willing outside reviewers
- Documentation of the critical review comments and responses
- Updated eLCAP project documentation
- Final online web help system
- Review of *eLCAP* (version 2.0)

Task 6: Updated software, software documentation, and help system

- Updated software
- Software documentation
- Online help system embedded in the software

Summary of Progress FY 2020-2021

The *eLCAP* software was updated with models and data for materials, construction, and the use stage developed in 2019 and 2020. Updates were also made to the user interface. Extensive testing was done by the UCPRC with Caltrans through a case study. A critical review panel of three international experts was identified and contracted. The *eLCAP* user manual report was prepared for the software and data quality method. As of June 2021, the critical review panel comments had been received and the software and *eLCAP* documentation were being updated in response. Caltrans is expected to begin piloting the software in September 2021, and work on other tasks to update the entire system will proceed during FY 2021-2022 based on a planned list of improvements and feedback from the pilot. Training will also be developed.

Multi-Criteria Decision Support for Prioritization of Strategies to Reduce Environmental Impacts

DRISI Project ID: 3822 | UCPRC Project Number: 3.56
 Caltrans Technical Lead: Kuo-Wei Lee, Office of Concrete Pavement, and Tom Pyle, Office of Asphalt Pavement
 UCPRC Project Managers: Ali Butt and John Harvey

Research Needs

Caltrans roadway decision makers need to quantify changes they are making to reduce greenhouse gas (GHG) emissions. They also need to prioritize proposed changes in practices and policies to reduce GHG emissions and other environmental impacts, considering both cost and reduction in environmental impact, to arrive at the most cost-effective use of limited resources. In the prioritization framework, consideration can also be given to social indicators and the equity of impacts. The multi-criteria decision analysis framework developed in the previous project for Caltrans that considers reduction in life cycle GHG emissions and life cycle cost needs to be updated and improved by considering other existing and current work. The system boundaries for the updated framework need to be updated to consider additional environmental impacts and the possible inclusion of social indicators and the equity of environmental impacts from implementation of GHG mitigation strategies. The analysis will be applied to approaches for reducing GHG emissions and other environmental impacts identified by Caltrans.

Objective/Goals

This study is a continuation of PPRC Project 4.72 (Life Cycle Assessment of Alternate Strategies for GHG Reduction). The objective of this project is to include other environmental impacts in the supply curve method, identify potential social indicators and equity considerations, and investigate other multi-criteria decision analysis frameworks—life cycle assessment and life cycle cost analysis—that can be used by Caltrans in its decision-making process.

Deliverables

Task 1: Literature review of existing multi-criteria decision analysis (MCDA) frameworks

• Summary literature survey of MCDA, including a critique of the previously developed supply curve framework, additional strategies and more details for those identified in the Caltrans study, and inclusion of social indicators and equity in LCA at the state, regional, and neighborhood levels

Task 2:Expansion of the system boundaries of the supply curve method to include
other impacts

• Technical memorandum including literature survey and updated supply curve framework

Task 3: Case studies to demonstrate the enhanced framework and other MCDA methods

• Technical memorandum on evaluation of several strategies as case studies using the updated supply curve and relevant MCDA methods

Task 4: Preparation of white paper and policy brief

- White paper
- Policy brief

Summary of Progress FY 2020-2021

A literature review was performed to identify the multi-criteria decision support methods that are currently being used. A work plan for this project was developed mainly focusing on the needs of the Caltrans Office of Planning. Although this project was funded by Caltrans, the UCPRC has not been able to get a Caltrans technical lead for this project. Therefore, the project is currently on hold. The principal investigator is currently in contact with personnel from Caltrans, and the UCPRC might be able to change the scope of this project and begin work in FY 2021-2022.

Pavement Management System



Tri-Annual Performance Model Update

DRISI Project ID: 3814 | UCPRC Project Number: 3.57
 Caltrans Technical Lead: Robert Hogan, Office of Pavement Management
 UCPRC Project Manager: Jeremy Lea

Research Needs

By 2023 Caltrans will have collected four additional years of automated pavement condition survey (APCS) data, which are not included in the current performance models. Additional possibilities to improve processing of the old data need to be explored. *PaveM* will replace the built-in model framework with a custom script-based implementation to enable the direct use of the statistical models in *PaveM*. New models will be needed for any new treatments and included in the new implementation framework. Currently, continuously reinforced concrete; full-depth recycling; partial-depth recycling; and crack, seat, and overlay treatments have models that need improvements.

Study Objective/Goal

This study is a continuation of PPRC Project 4.68 (Improved Smoothness and Distress Models for *PaveM*). The objective of this project is to develop updated performance models and any improvements in *PaveM* needed to use them.

Deliverables

Task 1:	Continued performance model database development
	 Updated performance modeling database
Task 2:	Continued and enhanced empirical model development
	New empirical performance models
Task 3:	Delivery and integration of new performance models into PaveM
	 Performance models implemented and validated in PaveM
Task 4:	Development of alternative models as needed
	 Implementation of alternative models in PaveM as needed
Task 5:	Reporting of model results
	• A final report detailing the empirical models developed, along with updates to the

relevant PaveM documentation sections

Summary of Progress FY 2020-2021

Most of the work on this project has focused on Task 1 (updating the performance modeling database). During FY 2020-2021, the 2016 and 2019 data segment level APCS data were imported, work began on importing the 2021 transportation system network data for a 2021 linear referencing system update, the data extraction was revised to not average data when overlaps occur, and columns were added to capture pavement features not currently captured in the as-builts (particularly widened concrete lanes). Some as-built data were also updated. Data extractions were also performed for continuously reinforced concrete pavement (for NCE) and for the widened lane jointed plain concrete pavement projects. A work plan was developed and approved, and work continues on documentation of the *PaveM* engineering configuration.

Continued Calibration of Mechanistic-**Empirical Design Models with Pavement** Management System Data

DRISI Project ID: 3764 | UCPRC Project Number: 3.58 Caltrans Technical Lead: Raghubar Shrestha, Office of Asphalt Pavement, and Kuo-Wei Lee, Office of Concrete Pavement UCPRC Project Managers: Jeremy Lea and Rongzong Wu

Research Needs

Pavement performance data are collected for Caltrans on a yearly basis. The newly available data should be used to update calibrations in both CaIME and Pavement ME. An extensive amount of data is generated through various Caltrans activities. These data need to be organized and integrated to provide additional data for periodic mechanistic-empirical (ME) calibration. Detailed field testing and performance data are needed for jointed plain concrete pavement (JPCP) projects with current design features at midlife to supplement pavement management system data. The calibrations for CalME and *Pavement ME* need to be updated using the newly available data.

Objectives/Goals

The objective of this project is to establish an efficient and repeatable procedure for updating field calibration of ME design methods.

Deliverables

Task 1:	Updated calibration data
	 Technical memorandum with results of field testing and laboratory testing of field-
	sampled materials, comparisons with Pavement ME, and recent calibration assumptions
	and results

Updated calibration database

- Task 2: Updated CaIME calibration
 - Technical memorandum on updated CaIME calibration
- Task 3: **Updated Pavement ME calibration**
 - Technical memorandum on updated *Pavement ME* calibration
- **Integration of network-level ME data management** Task 4:
 - Technical memorandum on how to integrate various data at the network level for ME calibration

Task 5: Preparation of project documentation

- Quarterly presentation to Caltrans regarding research progress
- Technical memoranda listed in Task 2, 3, and 4

Summary of Progress FY 2020-2021

A work plan for this project was developed and approved. The calibration data for in-place recycling and the *CalME* calibration for these treatments have been updated. A report on the *CalME* calibration has been completed. An outside review panel has been assembled and completed the review of *CalME*, and comments are being addressed. A plan for follow-up data collection (including field sampling) on the existing long life sections (both asphalt and concrete) has been developed, and field work is starting. The calibration of *Pavement ME* has been refined based on the new widened lane JPCP data, and the recommendations have been updated.

Improved Traffic Models for PaveM and Mechanistic-Empirical Design

DRISI Project ID: 3765 | UCPRC Project Number: 4.81
 Caltrans Technical Lead: Robert Hogan, Office of Pavement Management
 UCPRC Project Managers: Jeremy Lea and Changmo Kim

Research Needs

The traffic calculation models in *PaveM* need to be updated based on changes and updates to the road networks made over time in California. The traffic information calculated from the updated process needs validation to ensure its accuracy across the statewide network, especially for the segments where changes in geometry or post-mile have occurred and for routes with limited traffic information. The traffic information models in *PaveM* are accessed by pavement design and life cycle cost analysis and life cycle assessment software.

Objective/Goals

The objective of this project is to update the traffic calculation models in *PaveM* to improve the accuracy of traffic information for road segments.

Deliverables

Task 1: Improvement of current traffic models

- Summary notes of literature review
- Summary notes of traffic models
- Updated version of network-level traffic information
- Presentation materials

Task 2: Development of lane-based traffic information for heavy vehicles

- Lane-based traffic information database, including lane distribution factors, truck information, and weigh-in-motion (WIM) spectra per lane
- Summary notes and presentation materials
- Task 3: Calculation of the traffic index for PaveM
 - Traffic index data file
 - Summary notes and presentation materials of traffic index estimates

Task 4: Implementation of WIM spectra in CalME and Pavement ME

- Functional traffic information (monthly and hourly distribution tables) of WIM spectra for *CalME* and *Pavement ME*
- Summary notes and presentation materials of WIM spectra files

Task 5: Collection of traffic data for model verification on roads with no sensors

- Traffic data files and summary notes
- Presentation materials on the verification results

Task 6:Preparation of study report

• Technical memorandum

Summary of Progress FY 2020-2021

Current traffic models and collected literature have been reviewed, and a framework for updating current traffic models was developed. The existing traffic database structure in *PaveM* was reviewed. Traffic information (WIM) was collected, traffic parameters were identified, and lane-based traffic patterns for heavy vehicles were analyzed. The new WIM spectra developed in the previous contract were implemented in the *CaIME* and *PavementME* software.

Potential for Advanced Image Evaluation in Automated Pavement Condition Surveys (APCS)

DRISI Project ID: 3766 | UCPRC Project Number: 4.82 Caltrans Technical Lead: Imad Basheer, Office of Pavement Management UCPRC Project Manager: Jeremy Lea

Research Needs

New technologies are available that use image analysis to discover features of the pavement from automated pavement condition surveys (APCS) images and data that would be useful for performance prediction and treatment selection. These technologies are best evaluated by testing their readiness on problems such as drainage evaluation and flagging of replaced concrete slabs. This investigation will involve the development of extensive "training" datasets where these features have been manually flagged.

Objective/Goals

The objective of this project is to propose improvements to APCS data collection to facilitate advanced image analysis and a possible pilot implementation.

Deliverables

- Task 1:Capacity development at the UCPRC, including background and establishment of
a knowledge and computing environment suitable for training deep learning
neural network models
 - A functional machine-learning environment accessible to UCPRC researchers, with training materials about how it can be used
- Task 2:Library of tagged images, using various right-of-way and pavement surfaceimages from different vendors
 - Database of tagged images tied to the performance modeling database
- Task 3:Model for flagging recently replaced slabs on jointed plain concrete pavements
and patches on asphalt
 - A trained deep learning agent capable of predicting if a slab observed in an image has been recently replaced
 - A trained deep learning agent capable of identifying recently patched areas of the pavement surface

Task 4:Model for categorizing the drainage conditions and other roadside features at
various locations

• A trained deep learning agent capable of predicting, from the right-of-way image, the state of the drainage at a particular location

Task 5:Georgia Tech subcontract

- Advice to the UCPRC on state-of-the-art automated pavement condition survey machine-learning technology advances and planned future developments being funded by the Federal Highway Administration
- Assistance in development of two case studies on finding replaced concrete slabs, identifying drainage features, and classifying their condition

Task 6: Final report and possible pilot implementation

 Technical memorandum on and recommendations for future uses of advanced image analysis in automated pavement condition surveys

Summary of Progress FY 2020-2021

A work plan was developed for this project, and the subcontract with Georgia Tech was executed. Meetings have been held to begin work with the subcontractor, but misunderstandings with the subcontractor about work plan expectations and what was agreed to in the contract have taken some time to resolve. A new work plan has been prepared, and it is currently being approved. Some work has been done to begin the data capture needed for the training of the deep learning algorithms.

Updates and Improvements to RealCost-CA

DRISI Project ID: 3815 | UCPRC Project Number: 3.59
 Caltrans Technical Lead: Leonardo Mahserelli, Office of Concrete Pavement
 UCPRC Project Manager: Changmo Kim

Research Needs

Variability and uncertainty of agency and user cost estimates and treatment lives of pavement materials are the key areas of life cycle cost analysis (LCCA) and decision support. Variability and uncertainty in LCCA need to be investigated, and methods of considering them in decision support need to be developed. Caltrans has implemented new pavement materials and treatments and their LCCA procedures, and maintenance and rehabilitation schedules need to be developed and included in the LCCA procedures manual and *RealCost-CA*.

The LCCA procedures manual needs to be continuously updated as new materials and treatments are developed so that designers can consider them along with current materials and treatments when comparing alternatives. An operation manager's manual needs to be developed with detailed procedures for updating default variables such as material unit prices, construction price indices, and other time-sensitive variables. The manual should also describe use of the software and management of input and output files by users. Traffic congestion in construction work zones (CWZs) during reconstruction and rehabilitation causes additional delay and associated road user costs, particularly on urban highways but also on rural routes. Consideration of construction-related delay is a part of Caltrans and Federal Highway Administration LCCA procedures. Better procedures are needed for estimating project-based road user costs from CWZ congestion on future maintenance and repair treatments.

Objective/Goals

This study is a continuation of PPRC Project 3.44 (Update Life-Cycle Cost Analysis Manual and RealCost Version 3.0). The objective of this project is to continue updating the Caltrans *Life-Cycle Cost Analysis Procedures Manual* and *RealCost 3.0CA*.

Deliverables

Task 1: Consideration of variability and uncertainty for cost and treatment lives

• Summary notes and presentation file

Task 2: Procedures for estimating maintenance and repair schedules for new treatments

- Engineering configuration for maintenance and repair schedules for new treatments
- Updated maintenance and repair sequence selection function in RealCost-CA

Task 3: Operation manager's manual for RealCost-CA

- Online operation manager's manual for RealCost-CA
- Summary notes and presentation file

Task 4: Implementation of CWZ studies into RealCost-CA

• Engineering configuration for CWZ calculation and an updated *RealCost-CA* version reflecting new CWZ calculation methods

Task 5: Preparation of project documentation

Technical memorandum

Summary of Progress FY 2020-2021

The maintenance and rehabilitation schedules for both asphalt and concrete pavements were updated through mechanistic-empirical approaches (*CalME* and *PavementME*) for Caltrans' latest pavement design methods. The maintenance costs—including preventive treatment, capital maintenance, and rehabilitation—were calculated from the latest construction cost data and updated in the *Life-Cycle Cost Analysis Procedures Manual*. Studies on consideration of variability and uncertainty for cost and treatment lives, maintenance and repair schedules for new treatments, and implementation of CWZ traffic delay models are included in this task. A framework for an operations manual was designed, and development of an interface for the operation manual was started. *RealCost 3.0CA* was completely debugged.

Support Tasks



Develop and Manage Partnered Pavement Research Program

DRISI Project ID: 3823 | UCPRC Project Number: 2.01

Overview

Provide management and administration of the overall PPRC contract, and work to establish partnerships with organizations outside of Caltrans to improve Caltrans pavements.

Summary of Progress FY 2020-2021

The UCPRC provided contract and financial administration for projects and worked with industry and other government agencies to support Caltrans-sponsored research.

Provide Advice to State Government on Pavement Technology

DRISI Project ID: 3829 | UCPRC Project Number: 2.02

Overview

Perform conceptual and feasibility studies (small projects at a cost of less than \$10,000), answer questions, and provide information, as requested by Caltrans.

Summary of Progress FY 2020-2021

The UCPRC's advice has primarily involved supporting Caltrans with requests for information, background briefings, and input for decision-making not tied to PPRC projects.

Provide Support for Pavement Management System (PaveM) Operations

DRISI Project ID: 3832 | UCPRC Project Number: 2.03

Overview

Provide continued support for implementation of pavement and asset management within Caltrans, including updates and enhancements to *PaveM*, support for the "pavement portal" applications, and other tasks as directed by Caltrans. Specific tasks include the restructuring and improvement of project information within *PaveM*; annual updating of linear referencing system (LRS), traffic data, and other data; application of the segmenting processes; and documentation of existing engineering configuration, software, and processes.

Summary of Progress FY 2020-2021

Work on this task is as needed by Caltrans. In FY 2020-2021, this work has involved assistance to Caltrans with debugging issues in *PaveM*, discussions around the transition to the new 2019 LRS and models, meetings and planning for the software upgrade to *PaveM*, and various updates to the UCPRC information technology infrastructure that supports the PaveM Portal applications. This support work also included responding to questions from Caltrans about the various *PaveM* support tools (*PCR*, *H-Chart*, *iGPR*, *iGPR-Core*, *PaveM Portal*, *RP-List*) and making changes to them, updating the various files (Highway Log, Project History, Automated Pavement Condition Surveys, and Previous Year Actuals) that are exported out of *PaveM* for use in the UCPRC *PaveM* tools, and fixing bugs and resolving issues related to the server, as necessary.

The programmer/engineer who developed the PaveM Portal applications retired in June 2021, and a new programmer was hired at the end of the fiscal year to assume this role. This personnel change has involved recruitment efforts and transitioning of the tools, including moving the revision tracking from an internal SubVersion server to GiHub, where the code can be shared with Caltrans.

Provide Support for CalME, PavementME, and CalBack

DRISI Project ID: 3831 | UCPRC Project Number: 2.04

Overview

Provide support and training for use of *CaIME, PavementME*, and *CaIBack* to Caltrans users and other users as identified by Caltrans. Update the interface and internal operations of *CaIME, PavementME*, and *CaIBack* as requested by Caltrans.

Summary of Progress FY 2020-2021

The UCPRC provided extensive support for rewriting of the Caltrans *Highway Design Manual* to reflect updated practice using mechanistic-empirical design and performance-related specifications. A site investigation guide for asphalt- and concrete-surfaced pavement was developed and submitted for review. An update was made to the *CalME* software based on input from the districts and other users.

Provide Support for eLCAP and RealCost-CA

DRISI Project ID: 3779 | UCPRC Project Number: 2.05

Overview

Provide support and training for use of *eLCAP* and *RealCost-CA* to Caltrans users and other users as identified by Caltrans. Update the interface and internal operations of *eLCAP* and *RealCost-CA* as requested by Caltrans.

Summary of Progress FY 2020-2021

The UCPRC provided support to Caltrans to answer questions from the districts and headquarters regarding life cycle cost analysis and to update the current *RealCost-CA* software. Support for *eLCAP* primarily consisted of helping Caltrans perform life cycle assessment case studies with the cement industry and supporting District 11 with a case study.

Maintain Laboratory Testing AASHTO Re:source Certification

DRISI Project ID: 3828 | UCPRC Project Number: 2.06

Overview

Calibrate laboratory equipment as needed for AASHTO and Caltrans quality assurance specifications to complete Caltrans projects, and pay for certification costs.

Summary of Progress FY 2020-2021

Funds for this support task were used for management of the UCPRC laboratories, including annual and biannual equipment calibrations and all aspects of maintaining Caltrans and AASHTO accreditations. Additionally, improvements to laboratory safety, occupational health, ergonomics, material and specimen flows, and general and management procedures continued. Changes to sustain operations during the COVID-19 pandemic were also implemented. Laboratory consumables (e.g., personal protective equipment, small tools, sample storage, cleaning materials) were also covered under this task.

Maintain Laboratory and Field-Testing Equipment Capability

DRISI Project ID: 3826 | UCPRC Project Number: 2.07

Overview

Maintain and/or replace laboratory and field equipment to complete Caltrans projects.

Summary of Progress FY 2020-2021

Funds for this support task were used to maintain and/or replace laboratory and field equipment to complete Caltrans projects. Equipment purchases included a double-bladed saw for cutting asphalt specimens, two dumpsters for disposing of tested specimens, a saw for cutting small specimens, totes for storing purified hydraulic oil, and an environmental chamber for curing recycled material specimens.

Maintain Heavy Vehicle Simulator Equipment

DRISI Project ID: 3827 | UCPRC Project Number: 2.08

Overview

Maintain, replace, and calibrate equipment used for accelerated pavement testing with the Heavy Vehicle Simulator (HVS) machines to complete Caltrans projects.

Summary of Progress FY 2020-2021

Funds for this task were used to maintain, replace, and calibrate equipment used for accelerated pavement testing with the HVS machines to complete Caltrans projects. Both machines are overdue for comprehensive hydraulic system overhauls, and this work was initiated. Unfortunately, COVID-19 shutdowns have significantly delayed delivery of critical parts for the overhaul process. Work on both machines included replacement of all hydraulic hoses, overhaul of the hydraulic pumps, and replacement of drive chains and sprockets. Work on HVS-2 included overhaul of the gearbox and replacement of the carriage control unit. A cooling system for the environmental chamber on HVS-3 was installed.

Operate Falling Weight Deflectometer and Profiler Calibration Centers

DRISI Project ID: 3825 | UCPRC Project Number: 2.09

Overview

Maintain space, equipment, and certifications for calibration of Caltrans and contractor profiler equipment to support Caltrans smoothness specifications. Maintain space, equipment, and certifications for operation as a Federal Highway Administration falling weight deflectometer (FWD) calibration center.

Summary of Progress FY 2020-2021

The FWD calibration slab was rehabilitated and recalibrated, and three FWDs were calibrated. Profiler calibrations were undertaken on 19 days, during which 37 Caltrans, 69 industry, and 4 UCPRC operators were certified, and 12 Caltrans and 25 industry vehicles and a UCPRC vehicle were certified.

Upgrade/Maintain Research Support Space

DRISI Project ID: 3824 | UCPRC Project Number: 2.10

Overview

Update, augment, and rehabilitate research support space in Davis and Richmond as needed to perform research for Caltrans.

Summary of Progress FY 2020-2021

Work included installation and certification of air conditioning and dust extraction systems in the four laboratories on the west side of the Davis building, installation of a certified fume hood for binder extraction, and construction of a new saw cutting and coring room. Compressed air systems were also refurbished to accommodate the additional equipment.

Provide Support to Division of Aeronautics

DRISI Project ID: 3780 | UCPRC Project Number: 2.11

Overview

Provide research, development, and implementation support for improved technologies and practices for airfields as requested by the Caltrans Division of Aeronautics. Coordinate activities with research sponsored by the Federal Aviation Administration.

Summary of Progress FY 2020-2021

A meeting was held with the Division of Aeronautics to identify needs, and a detailed work plan was prepared. Personnel changes at the division have delayed approval of the work plan and the start of work.

Conduct Advanced Pavement Research for Long-Term Future Needs

DRISI Project ID: 3830 | UCPRC Project Number: 2.12

Overview

Perform conceptual, research, and development studies for long-term future Caltrans and California transportation needs not directly tied to Caltrans line functions at the direction of DRISI.

Summary of Progress FY 2020-2021

Extensive laboratory and field-testing support was given to a pilot project for partial-depth recycling using recycled plastic. Work was also performed on a study of urban metabolism (circular economy) considering materials for hardscape and the water cycle in urban areas.

Appendix A: UCPRC Publications FY 2020-2021



Development of Performance-Based Specifications for Asphalt Rubber Binder: Interim Report on Phase 1 and Phase 2 Testing

Report Number: UCPRC-RR-2017-01 Publication Date: September 2020 Authors: David Jones, Hashim Raza Rizvi, Yanlong Liang, Jeffrey Buscheck, Mohammad Zia Alavi, and Bernhard Hofko Principal Investigator: John Harvey Caltrans Technical Lead: Guadalupe Magana Project: 4.50/4.63 (DRISI Task 2671/3186): Performance-Related Specifications for Rubberized Asphalt Binder Download: escholarship.org/uc/item/4mq5p6sd

Need for Research

In the United States, the Superpave Asphalt Binder Performance Grading system proposed by the Strategic Highway Research Program is the most common method used to characterize the performance-related properties of unmodified and polymer-modified asphalt binders. Dynamic shear modulus and phase angle are the two main binder properties measured using a dynamic shear rheometer with parallel plate geometry and either a 1 mm or 2 mm gap between the plates. Since these Superpave parameters were developed for binders that do not contain additives or particulates, Caltrans does not use them for asphalt rubber binder specifications. Instead, penetration and viscosity are used as acceptance of quality control. However, these parameters do not necessarily provide a satisfactory link between the measured binder properties and potential performance in the field over a range of operating temperatures.

Research Approach

Current specifications require that crumb rubber particles used to produce asphalt rubber binder in the "wet process" be smaller than 2.36 mm (i.e., 100% passing through the #8 sieve), and typically these particles vary in size between 1 mm and 2 mm. Consequently, when parallel plate geometry is used to test this type of binder, the rubber particle rheology can potentially dominate the results and may not be representative of the modified binder as a whole. To address this problem, a potentially more appropriate dynamic shear rheometer testing protocol using concentric cylinder geometry was investigated in Phase 1 of this study as an alternative means to determine the performance properties of asphalt rubber binders.

Phase 2 of the study continued the investigation into the use of the concentric cylinder geometry and alternate parallel plate geometry with a 3 mm gap. The use of these geometries for intermediate-temperature testing and multiple stress creep recovery testing was also investigated, as well as modified procedures for short-term aging in the rolling thin-film oven, long-term aging in the pressurized aging vessel, and specimen preparation procedures for bending beam rheometer testing. Limited mix testing was also conducted to relate high- and low-temperature mix performance to the performance grades determined for the binders used in the mixes.

Results

The concentric cylinder testing approach to measuring the rheological properties of asphalt rubber binders is considered feasible, and the edge effects and trimming issues associated with parallel plate testing can be eliminated with its use. However, the concentric cylinder method requires a longer testing time and a larger binder sample than the parallel plate test method. Initial findings from performance grading and related mix testing indicate that the incompletely digested rubber particles, which have different sensitivities to temperature and applied stress and strain than the asphalt binder, appear to dominate the test results. This issue will need to be factored into the analysis and interpretation of rheology and mix performance test results. The proposed modifications to the shortand long-term aging procedures and to the bending beam rheometer specimen preparation procedures are considered more aligned with the original intent of the tests and will likely reduce the variability between replicate specimens during testing.

Recommendations

The results from Phase 2 support the continuation of testing. The research should continue to refine the testing procedures on additional field binder sources, assess the repeatability and reproducibility of any proposed test methods, and evaluate the applicability of the results to the actual performance properties of mixes produced with asphalt rubber binders.

Optimizing Rubberized Open-Graded Friction Course (RHMA-O) Mix Designs for Water Quality Benefits: Phase I: Literature Review

Report Number: UCPRC-RR-2019-02 Publication Date: September 2020 Authors: Masoud Kayhanian and John Harvey Principal Investigator: John Harvey Caltrans Technical Lead: Simon Bisrat Project: Partnered Pavement Research Center (PPRC) Strategic Plan Element 2.7: Advice to Caltrans under Caltrans Contract 65A0628 Download: escholarship.org/uc/item/1870m3g9

Need for Research

Historically, rubberized and non-rubberized open-graded friction courses have been placed to provide three benefits: (1) increase traffic safety, (2) reduce urban highway noise, and (3) preserve the surface of the main pavement structural section. However, stringent environmental regulations on stormwater runoff management enacted recently have forced transportation agencies with limited rights-of-way in urban areas to search for creative methods to treat runoff and receive credits for preventing pollution from highways. The considerable research completed over the last 20 years needs to be summarized to help support Caltrans planning, research, and development for continued use of open-graded friction courses to achieve the benefits identified.

Research Approach

This literature review was undertaken to explore ways to optimize current rubberized hot mix asphalt-open graded (RHMA-O) mix designs to provide multifunctional benefits, including water quality treatment.

Results

The literature review shows that permeability measurement is an essential parameter that influences the performance of a wide range of open-graded (both rubberized and non-rubberized) pavements. Further, current Caltrans aggregate gradations contain a larger fraction of fine aggregate sizes, which may also influence the permeability and functional performance of RHMA-O pavements.

Recommendations

This literature review presents an action plan recommending that the next phase of this work include optimizing current Caltrans mix designs and the mix design procedure in the laboratory and undertaking subsequent field investigations.

Alternate Strategies for Reducing Greenhouse Gas Emissions: A Life Cycle Approach Using a Supply Curve

Technical Memorandum Number: UCPRC-WH-2019-01 Publication Date: August 2020 Authors: John Harvey, Ali Butt, Arash Saboori, Mark Lozano, Changmo Kim, and Alissa Kendall Principal Investigator: John Harvey Caltrans Technical Lead: Julia Biggar Project: Partnered Pavement Research Center (PPRC) Project Number 4.72 (DRISI Task 3209): LCA Alternate Strategies for GHG Reduction: Example Strategies Download: escholarship.org/uc/item/7208x78q

Need for Research

The purpose of this white paper is to provide Caltrans with a methodology that uses life cycle assessments and life cycle cost analyses to create a "supply curve" that ranks the different strategies/actions that can be taken to reduce greenhouse gas (GHG) emissions and lessen any other environmental impacts that affect ecosystems and human health. For Caltrans to implement the proposed methodology, the process must be validated and assessed using currently available strategies. This white paper presents the methodology and demonstrates its initial use in quantifying and ranking several potential strategies.

Research Approach

The approach taken to support the prioritization of strategies for reducing GHG emissions was to develop what are variously called supply curves, marginal abatement curves, or McKinsey curves. Caltrans and the research team discussed six strategic pilot case studies to test the methodology and to measure the results of the strategies. The six strategies were grouped into three categories:

- 1. Pavement Management Related
 - a. Fuel use reductions through pavement network roughness management
 - b. Increased use of recycled asphalt pavement (RAP)
- 2. Renewable Energy Generation Related
 - a. Energy harvesting using piezoelectric devices under the pavement surface
 - b. Solar and wind energy production on state rights-of-way
- 3. Caltrans Operations Related
 - a. Automation of bridge tolling systems
 - b. Alternative fuel technologies for agency vehicle fleet

Results

The results showed that keeping the highest-traffic sections of the highway network smoother results in the largest GHG abatement, given the assumptions made in the analysis. This abatement costs Caltrans, but it has a low abatement unit cost. The most cost-effective strategy was increased use of RAP, but this strategy has a perverse effect in that the lowest-cost rejuvenating agent capable of blending the RAP into the mix well also has a higher GHG impact. Therefore, if this lowest-cost rejuvenator is used, the GHG emissions reduction is very small. However, in both cases, the large cost savings to the contractor of using RAP to replace virgin asphalt binder was assumed to be passed on to Caltrans through the low-bid contracting method.

The most expensive strategy per unit of GHG saved appeared to be changing the Caltrans vehicle fleet to electric cars and biodiesel trucks, regardless of the rate of change considered (all at once or following Department of General Services policy). Automated bridge tolling is always cost-effective, but that cost-effectiveness decreases as vehicles using the bridges become more electrified (a perverse conclusion that often occurs in these types of analyses). The cost-effectiveness of both increasing solar and wind energy from Caltrans rights-of-way and parking lots and of installing piezoelectric energy collection devices under pavements is highly dependent on the price given to Caltrans for the energy delivered, either saving or costing Caltrans per unit of GHG reduced.

Recommendations

Further consideration must also be given to implementation readiness because solar and wind technologies are proven technologies while piezoelectric energy generation devices are in the early stages of development and many questions remain about the efficacy of putting these devices under pavement.

Life Cycle Assessment and Life Cycle Cost Analysis for Six Strategies for GHG Reduction in Caltrans Operations

Technical Memorandum Number: UCPRC-TM-2019-02

Publication Date: September 2020

Authors: John Harvey, Ali Butt, Arash Saboori, Mark Lozano, Changmo Kim, and Alissa Kendall

Principal Investigator: John Harvey

Caltrans Technical Lead: Julia Biggar

Project: Partnered Pavement Research Center (PPRC) Project Number 4.72 (DRISI Task 3209): LCA Alternate Strategies for GHG Reduction: Example StrategiesDownload: escholarship.org/uc/item/0mx245rd

Need for Research

California state government has established a series of mandated targets for reducing the greenhouse gas (GHG) emissions that contribute to climate change. The various sources of emissions and economic sectors mean that no single change the state can make will enable it to achieve the ambitious goals set by executive orders and legislation. Instead, many actors within the state's economy—including state agencies such as Caltrans—must make multiple changes to their own internal operations.

The focus of this study and technical memorandum is to examine several strategic options that Caltrans could adopt to lower its GHG emissions from operations of the California state highway network and other transportation assets to help meet the state's GHG reduction goals. Although many GHG reduction strategies appear to be attractive, simple, and effective, most also have limitations, tradeoffs, and unintended consequences that cannot be identified without a preliminary examination of the full system within which they operate and their full life cycle. To achieve the most rapid and cost-effective changes possible, the costs, times to implement, and difficulty of implementation should also be considered when the alternative strategies are prioritized.

Research Approach

This project first developed an emissions reduction "supply curve" framework by using life cycle assessments to evaluate full-system life cycle environmental impacts and life cycle cost analyses to prioritize the alternative GHG reduction strategies based on benefit and cost. This framework was then applied to an example set of strategies and cases of Caltrans operations.

Results

This technical memorandum presented the results of the supply curve framework's development and its application to six strategies for changing several Caltrans operations. The six strategies were (1) pavement roughness and maintenance prioritization, (2) energy harvesting using piezoelectric technology, (3) automation of bridge tolling systems, (4) increased use of recycled asphalt pavement, (5) alternative fuel technologies for the Caltrans vehicle fleet, and (6) solar and wind energy production on state rights-of-way. The memorandum includes the details, assumptions, calculation methods, and results of the development of the GHG reduction supply curve for each strategy.

Recommendations

Although this current study's scope is limited to development of a supply curve for GHG emissions only, there are plans to expand the study's scope to include other environmental impacts and to develop supply curves for those impacts.

Effects of Increased Weights of Alternative Fuel Trucks on Pavement and Bridges

Report Number: UC-ITS-2020-19 Publication Date: November 2020 Authors: John Harvey, Arash Saboori, Marshall Miller, Changmo Kim, Miguel Jaller, Jon Lea, Alissa Kendall, and Ashkan Saboori Principal Investigator: John Harvey Download: escholarship.org/uc/item/4z94w3xr

Need for Research

California's truck fleet composition is shifting to include more natural gas vehicles, electric vehicles, and fuel cell vehicles, and it will shift more quickly to meet state greenhouse gas (GHG) emission goals. These alternative fuel trucks (AFTs) may introduce heavier axle loads, which may increase pavement damage and GHG emissions from work to maintain pavements. This project aims to provide conceptual-level estimates of the effects of vehicle fleet changes on road and bridge infrastructure.

Research Approach

Three AFT implementation scenarios were analyzed using typical California state and local pavement structures, and a federal study's results were used to assess the effects on bridges.

Results

This study found that more natural gas, electric, and fuel cell trucks are expected among short-haul and medium-duty vehicles than among long-haul vehicles. However, the estimates predicted that by 2050 alternative fuels would power 25%–70% of long-haul and 40%–95% of short-haul and medium-duty trucks. AFT implementation is expected to be focused on the 11 counties with the greatest freight traffic—primarily urban counties along major freight corridors.

Results from the implementation scenarios suggested that introducing heavier AFTs will only result in minimal additional pavement damage, with the extent dependent on the pavement structure and AFT implementation scenario. These estimated results for the effects on pavement were based on the assumption that AFTs will become lighter as they are implemented.

Recommendations

Although allowing weight increases of up to 2,000 lb is unlikely to cause major issues on more modern bridges, the effects of truck concentrations at those new limits on inadequate bridges needs more careful evaluation. The study's most aggressive market penetration scenario for AFT yielded an approximate net reduction in annual well-to-wheel truck propulsion emissions of 1,200–2,700 kT per year of CO_2 -e by 2030 and 6,300–34,000 kT by 2050 compared to current truck technologies. Negligible effects on GHG emissions from pavement maintenance and rehabilitation resulted from AFT implementation.

Heavier Alternative Fuel Trucks Are Not Expected to Cause Significant Additional Pavement Damage

Publication Date: November 2020

Authors: John Harvey, Arash Saboori, Marshall Miller, Changmo Kim, Miguel Jaller, Jon Lea, Alissa Kendall, and Ashkan Saboori
 Project: UC ITS Project ID: UC-ITS-2020-19
 Download: escholarship.org/uc/item/2p76t1g4

Need for Research

Medium- and heavy-duty trucks on California's roads are shifting from conventional gasoline and diesel propulsion systems to alternative fuel (natural gas, electric, fuel cell) propulsion technologies, spurred by the state's greenhouse gas (GHG) reduction goals. While these alternative fuel trucks (AFTs) produce fewer emissions, they are also currently heavier than their conventional counterparts. Heavier loads can cause more damage to pavements and bridges, triggering concerns that clean truck technologies could actually increase GHG emissions by necessitating either construction of stronger pavements or more maintenance to keep pavements functional. California Assembly Bill 2061 (2018) allows a 2,000 lb gross vehicle weight limit increase for near-zero-emission vehicles and zero-emission vehicles to enable these trucks to carry the same loads as their conventional counterparts. The law also asked the University of California Institute of Transportation Studies to evaluate the new law's implications for GHG emissions and transportation infrastructure damage.

Research Approach

This analysis considered three adoption scenarios of AFTs in two timeframes, 2030 and 2050. Based on these scenarios, life cycle assessment and life cycle cost analysis were used to evaluate how heavier trucks might affect pavement and bridge deterioration, GHG emissions, and state and local government pavement costs. The study did not evaluate the safety implications of increasing allowable gross vehicle weights.

Results

The findings indicated that introducing heavier AFTs, as allowed by AB 2061, is expected to result in only minimal additional damage to local and state government-owned pavements. Although natural gas vehicle technology cannot become lighter, it is not expected to have significant market penetration. In addition, the cost of additional pavement damage from AFTs will be negligible.

Projected GHG emissions reductions from AFT adoption will far outweigh emissions from additional road maintenance. The research also showed that ability to model the effects of heavier AFTs on bridges is very limited.

Recommendations

As California transitions to AFTs, monitoring changes in pavement and bridge damage will be important. Refining the results of the current research will require improvements in data collection and models for implementation of AFTs, alternative fuel vehicle axle and vehicle weight changes, GHG emissions related to truck manufacture and use, the effects of road roughness on AFT energy use, and bridge deterioration.

Guide for Partial- and Full-Depth Pavement Recycling in California

Guideline Number: UCPRC-GL-2020-01 Publication Date: December 2020 Authors: David Jones, Stephanus Louw, and John Harvey Principal Investigator: John Harvey Caltrans Technical Lead: Allen King Project: Partnered Pavement Research Center (PPRC) Contract Strategic Plan Elements 4.59, 4.65, 4.69, and 4.70 (DRISI Tasks 2707, 3194, 3195, and 3196): Improved Guidance and Specifications for In-Place Recycling Download: escholarship.org/uc/item/54z679x4

Need for Research

This document provides guidance to practitioners on project investigation, recycling strategy selection, pavement structural design, environmental life cycle and life cycle cost assessment, mix design, and construction of in-place pavement recycling projects on flexible pavements in California.

Research Approach

This research included a desktop study; a preliminary site investigation; a detailed site investigation; and a decision-making process to select the most appropriate maintenance, rehabilitation, or reconstruction strategy.

Recommendations

The main changes and updates to the 2017 version of the guide (UCPRC-GL-2017-04) include:

- Updates to terminology used for in-place recycling
- Updates to the project investigation chapter, including alignment with the new Caltrans site investigation guide
- Updates throughout the guide to include cold central plant recycling
- Inclusion of mechanistic-empirical design procedures (CalME) in the design chapter
- Updates to the mix design chapter to align with the new California Test Method for mix design for partial-depth recycling
- Inclusion of a provisional laboratory procedure for mix designs for full-depth recycling with cement
- Updates to the construction chapter to align with recent specification changes

Updates to CalME and Calibration of Cracking Models

Report Number: UCPRC-RR-2021-01
Publication Date: March 2021
Authors: Rongzong Wu, John Harvey, Jeremy Lea, Angel Mateos, Shuo Yang, and Noe Hernandez
Principal Investigator: John Harvey
Caltrans Technical Lead: Raghubar Shrestha
Project: Partnered Pavement Research Center Strategic Plan Element (PPRC SPE) 2.9 (DRISI Task 3215): CalME Support
Download: escholarship.org/uc/item/460234g0

Need for Research

The conventional approach to calibrating a mechanistic-empirical (ME) method, which has been used since calibration of the Shell Method and Asphalt Institute Method in the 1970s and early 1980s, has limitations. First, it requires expensive and time-consuming sampling and testing of materials properties for each section, resulting in a small number of sections being available for calibration. Second, it ignores the fact that a design-bid-build (low-bid) designer does not know the performance-related properties of the materials the contractor will bring to the job, resulting in a blurred understanding of the sources of variability and their consideration in the design reliability approach. A new calibration approach is needed to calibrate *CalME* (version 3.0) while addressing these limitations, and a new approach is needed to account for reliability in ME designs.

Research Approach

The new calibration approach developed by the UCPRC to calibrate *CalME* (version 3.0) aims to improve calibration and the reliability approach used in ME design by: (1) using all the good-quality distress performance data and as-built data in the Caltrans pavement management system databases collected since 1978 and quality checked over the last 10 years, (2) using median properties to match median performance and using the variability of observed median performance to determine between-project variability, after using *CalME* to account for the effects of climate, pavement cross section, and traffic, and (3) backcalculating within-project variability by matching the shape of observed performance time history.

Results

The following enhancements and additions are all included in the revised program. First, the old software's fatigue cracking transfer functions for hot mix asphalt on aggregate base, cement-stabilized bases, and portland cement concrete were recalibrated using a new approach for the calibration of ME pavement design methods. Second, the updated program also includes new damage models and transfer functions for in-place recycling materials, including full-depth recycling with foamed asphalt plus cement and cement stabilization, and partial-depth recycling with emulsified asphalt and foamed asphalt plus cement. Third, the program now has been given the ability to model partial-depth recycling using cold central plant recycled materials. Fourth, new damage models have been introduced for cement-stabilized bases and cement-stabilized and lime-stabilized subgrade materials to correct problems with the models in *CaIME* (version 2.0). Fifth, minimum aggregate base thicknesses were developed based on calculations of permanent deformation under construction traffic. Lastly, simplified methods were developed for estimating subgrade stiffnesses (resilient modulus) based on dynamic cone penetrometer tests, California bearing ratio tests, and R-value tests.

Recommendations

The recommendations are that *CaIME* (version 3.0) be implemented for pavement design, the calibration be updated with new data approximately every three to five years, Caltrans traffic databases be checked before they are used again for recalibration, and use of the recently updated Caltrans Data Interchange for Materials Engineering (DIME) database of as-built data be considered for future calibrations.

Pavement ME Sensitivity Analysis (Version 2.5.3)

Report Number: UCPRC-RR-2019-02 Publication Date: May 2021 Authors: Ashkan Saboori, John Harvey, Jeremy Lea, Rongzong Wu, and Angel Mateos Principal Investigator: John Harvey Caltrans Technical Lead: Dulce Rufino Feldman Project: Partnered Pavement Research Center Strategic Plan Element (PPRC SPE) 3.49 (DRISI Task 3199): Implement Concrete ME Design Tools Download: escholarship.org/uc/item/6bv7d7t6

Need for Research

The *Mechanistic-Empirical Pavement Design Guide (MEPDG)* is a comprehensive tool first developed in 2002 by the American Association of State Highway and Transportation Officials (AASHTO) to analyze and design both flexible and rigid pavements. The models in the *MEPDG* are implemented in software called *Pavement ME*, a program calibrated using long-term pavement performance sections from throughout the United States, including some from California. The *MEPDG* recommends that nationally calibrated models be validated using local data and, if necessary, recalibrated.

Research Approach

The first step in recalibrating *Pavement ME* was to perform a sensitivity analysis to identify the most important variables and to look for results that do not match expected performance.

Results

This report presents the results of a sensitivity analysis showing the effects of design input variables controlled by the designer and those not known to the designer. The sensitivity analysis showed that the overall jointed plain concrete pavements performance prediction by *Pavement ME* is reasonable. The distresses predicted by *Pavement ME* did not show any unexpected trends for any of the variables considered in this sensitivity analysis.

Recommendations

The next steps are to complete the calibration using California pavement management system data and then develop the design tool with the calibrated *Pavement ME* coefficients.

tBeam—A Fast Model to Estimate Energy Consumption Due to Pavement Structural Response: Theoretical and Validation Manual

Report Number: UCPRC-RP-2021-01 Publication Date: June 2021 Authors: Shmuel L. Weissman and James M. Kelly Principal Investigator: John Harvey Caltrans Technical Lead: Deepak Maskey Project: Partnered Pavement Research Center (PPRC) Contract Strategic Plan Element 4.73: Fast Model Energy Consumption Structural Response Download: escholarship.org/uc/item/3bz9c13f

Need for Research

One of the most important contributors to the environmental impacts from use of highways is the energy exerted by vehicles, particularly routes that carry higher volumes of traffic. Part of this energy is consumed by response of the vehicle's tires and suspension to pavement surface roughness and macrotexture. Another part of the energy consumed is by energy dissipation due to the structural response of the pavement itself under the moving load. This document is the theoretical and validation manual for *tBeam*, standalone software for the analysis of energy dissipation in pavements under moving vehicles. *tBeam* was developed as part of the improvement of modeling capabilities for environmental life cycle assessment of pavements being conducted by the UCPRC for Caltrans.

Research Approach

The energy consumed due to structural response is controlled by the structural properties of the pavement, which are dependent on the time of day, the season, and the condition (damage) of the pavement. The energy dissipation also depends on the speed and weight of each moving wheel load. As a result, estimating the lifetime energy dissipated in a pavement structure requires multiple analyses considering the thousands of permutations of these variables for a given segment of the highway network. Therefore, models for pavement-vehicle energy dissipated energy and (2) high numerical efficiency.

For numerical efficiency, the *tBeam* software employs a one-dimensional finite-element based solution of a wheel traveling at a constant velocity on a viscoelastic beam-foundation system. A further reduction of numerical effort is obtained by formulating the model relative to a moving coordinate system attached to the wheel. The one-dimensional solution is, by nature, an approximation to the three-dimensional world. This approximation can be improved by incorporating a "correction factor," which is based on comparisons with pavement simulations accounting for the double curvature observed in loaded pavements. In this report, prediction disparity for a single structure is studied.

Results

The results showed a clear trend where the correction factor decreased with rising temperature and increased with higher velocity. This study was insufficient to establish a law for the correction factor, even for the single case studied. The correction factor ranged from about 1.25 at low temperature and high velocity to about 0.6 for high temperature and low velocity. The first part of this report presented the underlying theory for *tBeam* and implementation details. The second part presented closed form solutions for specialized pavement-foundation systems. The third component of the report presented some of the validation simulations undertaken to demonstrate the performance of *tBeam*, including comparisons with closed form solutions provided in the report and recommendations for further development of *tBeam*.

Recommendations

The following are recommendations for future research:

- A relation between the *tBeam* predicted energy dissipation and the predicted energy dissipation when accounting for the three-dimensional nature of the pavement system could be determined.
- Application of the load as a uniformly distributed pressure over a specified contact area can be easily changed to account for non-uniform distribution.
- A deformable wheel can replace the rigid wheel model employed by *tBeam*. This enhancement will result in a more realistic prediction of the contact area. Unfortunately, it will add to the numerical cost of the analysis. Therefore, such an enhancement would primarily benefit pavement research.
- *tBeam* can be enhanced to better account for the three-dimensional response of pavements. This enhancement would employ a formulation based on the shear deformable Reissner-Mindlin plate theory. To maintain efficiency, it would be formulated relative to a moving coordinate system. This tool would benefit both pavement research and sustainability analysis.

tBeam—A Fast Model to Estimate Energy Consumption Due to Pavement Structural Response User Manual

Report Number: UCPRC-RP-2021-01 Publication Date: June 2021 Authors: Shmuel L. Weissman Principal Investigator: John Harvey Caltrans Technical Lead: Deepak Maskey Project: Partnered Pavement Research Center (PPRC) Contract Strategic Plan Element 4.73: Fast Model Energy Consumption Structural Response Download: escholarship.org/uc/item/1pr693v3

Need for Research

This document constitutes the user manual for *tBeam*, standalone software for the analysis of energy dissipation in pavements under moving vehicles. *tBeam* was developed as part of the improvement of modeling capabilities for environmental life cycle assessment of pavements being conducted by the UCRPC for Caltrans.

Research Approach

tBeam is finite-element based, employing multilayered three-node Timoshenko beam elements resting on a viscoelastic Winkler foundation. It provides an approximation of the deflection bowl of pavements and the energy dissipated in pavement structures when subjected to loads moving at constant velocities.

Results

tBeam supports two loading options: (1) a uniform pressure (per unit length) applied to a segment at the center of the beam and (2) a rolling rigid wheel. To achieve numerical efficiency, the load-beam-foundation system is represented relative to a moving coordinate system attached to the moving load. The higher efficiency is made possible because, in this framework, an observer attached to the moving coordinate system perceives a "static" state (i.e., independent of time).

Recommendations

The standalone *tBeam* software serves two purposes. First, it provides developers of pavement life cycle assessment tools a "guide" as to how to integrate *tBeam* technology into their programs. To this end, the "main" of *tBeam* can be used as a "guide" for integrating *tBeam* capabilities within the life cycle assessment tool. Second, *tBeam* capabilities are relevant to pavement research in general. Thus, it could represent a useful addition to the toolset for pavement viscoelastic mechanics.

Appendix B: Pavement Research Roadmaps


in which and a share

UNIVERSITY OF CALIFORNIA PAVEMEN Davis • Berkeley CENTER			of Asphalt	reasonable tim	
CONCEPT	RESEA	ARCH	DEVEL	OPMENT	IMPLEMENTATION
Mechanistic-empirical approaches and tools for	Initial CaIME development v1.0 2003	2.9 Within-project and between- project variability concept 2017-2020	4.1 LEAP response model 2011-2014	3.52 Integration between CaIME & other operations (Design, DiME, PaveM) 2020-2023	Pilot and AC long life projects - I-710 AC long life (1999) - Pilot use of <i>CaIME</i> for design (3.15,
SCOPE asphalt surfaced pavement evaluation, design and analysis CAL/APT (1999) Fatigue cracking and rutting in classical ME framework; used on LA-710 long Life 3.1/4.1 Framework for CaIME Incremental-recursive design Calibration framework with laboratory, APT, test track, field and PMS data	Goal 6 Initial CaIME reflective cracking approach 2005	Improved material models - RAP/RAS (4.76, 4.79) - IPR (4.78, 3.52)	CalME v2.0 2011 CalBack backcalculation tool v1.0 2011	3.52 Update CalBack and make it web-based 2020-2023	2011-14) - TEH-5, SIS-5, SOL-80 AC Long Life (2011-14)
	gue cracking and ME framework; 0 long Life A.1 Framework for CaIME ork for CaIME Develop climate databases, traffic/WIM databases ork for CaIME Develop climate databases, traffic/WIM databases initial set of models: rutting, fatigue, crushing, aging, IRI., reflective cracking, etc. - New WI 017 3.31 Models 017 - Initial thixotrophy evaluation (rest periods), simplified temperature model, aging model, block cracking, improved reflective cracking model Modeling 017 3.32 Comparison of lab & field produced mix properties Integration	 RHMA-G (4.75) 2020-2023 3.52 Update ME models Effects of wander on rutting Effects of moisture on unbound lavers 	Initial HVS alibration 2005-2011 - Goal 1: Asphalt-Treated Permeable Base - Goal 3: Asphalt rubber and tire types - Goal 5: Wet condition ATPB - Goal 6: Reflective cracking - Goal 9: New rubberized overlays - Field data: US-101, StanTec - External data: WesTrack, CEDEX, NCAT Florida sections, MnRoad 3.18/3.30/3.38 Standard material testing - Building Standard Materials Library 2011-2020 3.31/3.32/3.37 Test methods - Sine vs Haversine for fatigue testing - RSST to RLT conversion 2014-2020 2.9/3.36 CaIME v3.0 web-based - Software - Training - Site inv. Guide, HDM, CT 357 2017-2020	2.04 Operations support for CaIME & CalBack 2020-2023	3.33/3.37 CalME for SAC-5 long life 2014-2021
				3.51/4.79 Improved asphalt aging calibration 2020-2023	3.52 New models as completed 2020-2023
		- New WIM categories 2020-2023		Additional APT calibration - R21 composite pavement - FDR (4.36), wet FDR (4.59) - WMA, RWMA (4.18) - OGFC (3.21) - Any new HVS test data - FAA NAPTF	3.41/2.04 CaIME v3.0 continued roll o & training 2020-2023
Spatial variability 2011-2017 Integration framework for databases		interlayer base and overlay interlayer base and overlay reflective cracking performance MED-D 2020-2023 Improved fatigue and top-down cracking models Integration of empirical- mechanistic surface degradation models in <i>CalME</i> for complete analysis for LCA, LCCA I IRI, noise, skid resistance, permeability, age-related cracking, fuel consumption Continued improvement on between- and within-project variability considerations RAP, material (construction, mix design, binder, rubber)			Integrated databases & definitions PavementME, design methods, LCCA & LCA
between CalME, PaveM, LCCA, LCA				Top-down cracking model	Integrate LCA and LCCA calculation
characteristics prediction				Integrate improvements in PRS for asphalt & concrete into CaIME	Implement tBeam: structural energy model in <i>CalME</i>
New approach for models for climate	3.36 Initial in-place recycling models 2014-2017			tBeam: calibration of structural energy model against 3-D models	Implement improved asphalt aging model
Improved response models	 3.38/3.41 Improve ME Models Rest period determination Aging model (3.38 as well) 			Soils characterization for recycled pavement design: durability, stiffness and shear strength	CCPIC CaIME for non-Caltrans user
Project level TSD for site investigation	 Models for FDR-C and FDR-FA Improved PDR models Characterization of constructed 		3.41/3.49 Integrate asphalt & PCC pavement design methods & tools 2017-2020	AB specification for recycled material	
Alternatives to TSD:	 pavements Traffic reflective cracking model, updated strain calculation 2017-2020 	Bonding and delamination model	3.41 Field calibration with Caltrans APCS data 2017-2020 3.51/4.78 Standard material testing		

Project Past FOR MORE For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu Key – – – Proposed – – – Future INFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov

This roadmap has interactions with the Asphalt PRS, LCA, LCCA, RAS/RAP, Rubberized Asphalt, In-Place Recycling, ME Concrete and PMS roadmaps

Pavement Research Roadmap ME Design of Asphalt version date December 9, 2020

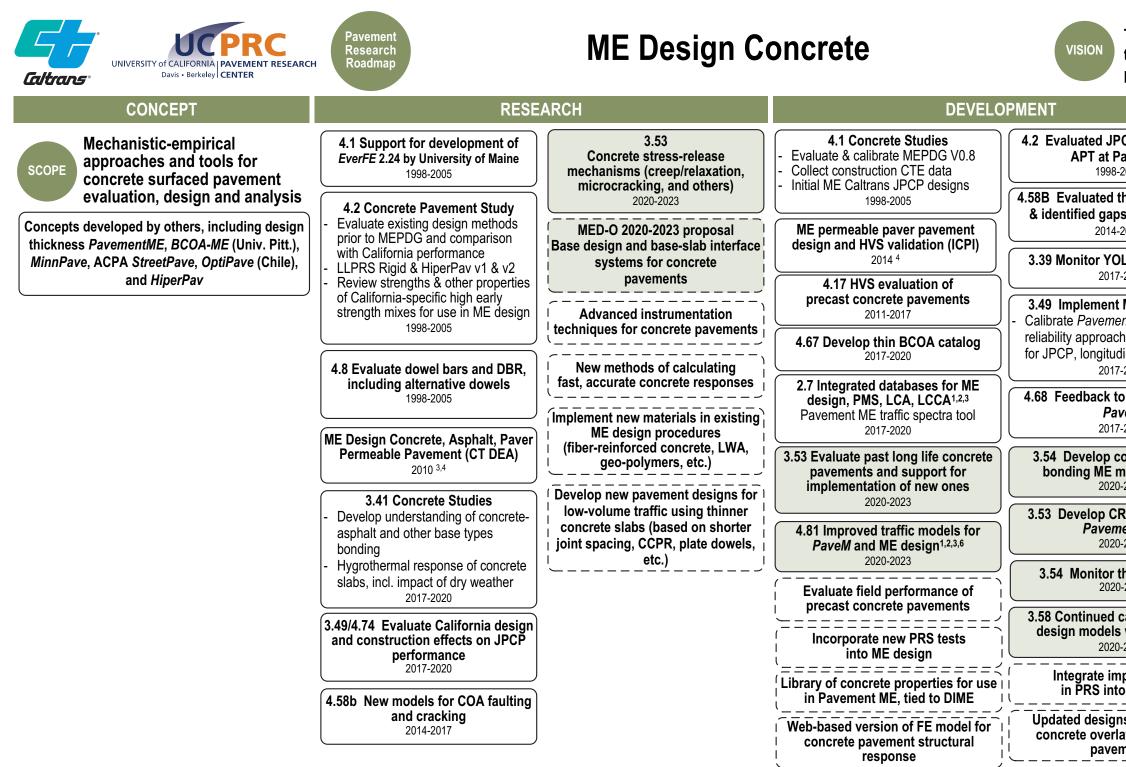

FOR MORE INFORMATION For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov Key --- Future Proposed --- Future

Linked Roadmaps 4-Pavement Management System 2-Life Cycle Assessment 3-Life Cycle Cost Analysis 4-New Concepts For Materials & Structures 5-Concrete PRS 6-ME Asphalt

PARTNERED PAVEMENT RESEARCH CENTER 83

To develop and use a design procedure that provides the most accurate prediction of concrete pavement performance possible within a reasonable time & cost

	IMPLEMENTATION
PCP designs with Palmdale 3-2005	Train Caltrans on ME Design
thin COA designs ps in knowledge I-2017	Training on ME design for local government for more than concrete
DL- 113 COA pilot 7-2020	
t ME design tools entME, Improve ch, develop catalogue idinal cracking model 7-2020	
to ME design from aveM 7-2020	
concrete-asphalt model and test 0-2023	
CRCP catalog with ment ME 0-2023	
thin COA pilots	
calibration of ME s with PMS data 0-2023	
nprovements to ME dsign	
ins for unbonded lays of concrete ements	

Pavement Research Roadmap ME Design Concrete version date December 3, 2020 Caltrans




Pavement

Roadmap

In Place and Cold Central Plant Recycling Research

VISION

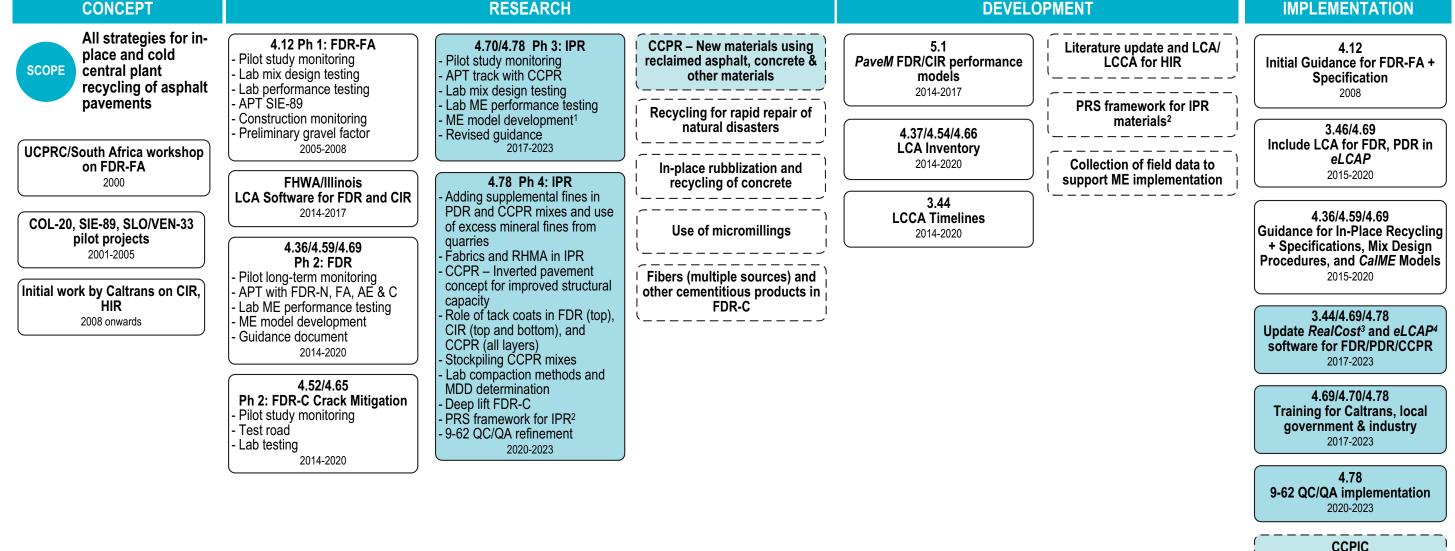


----- Past Project _____ Current Linked FOR MORE For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu Key — — — Proposed Roadmaps NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov — — — Future

Reduce life cycle cost, environmental impacts, road user impacts, conserve resources through appropriate use of in-place and cold plant recycling

> In-place recycling guidance for local government

¹ Asphalt ME design (CaIME) ² Asphalt performance related specifications

Pavement Research Roadmap In-Place Recycling version date November 24, 2020

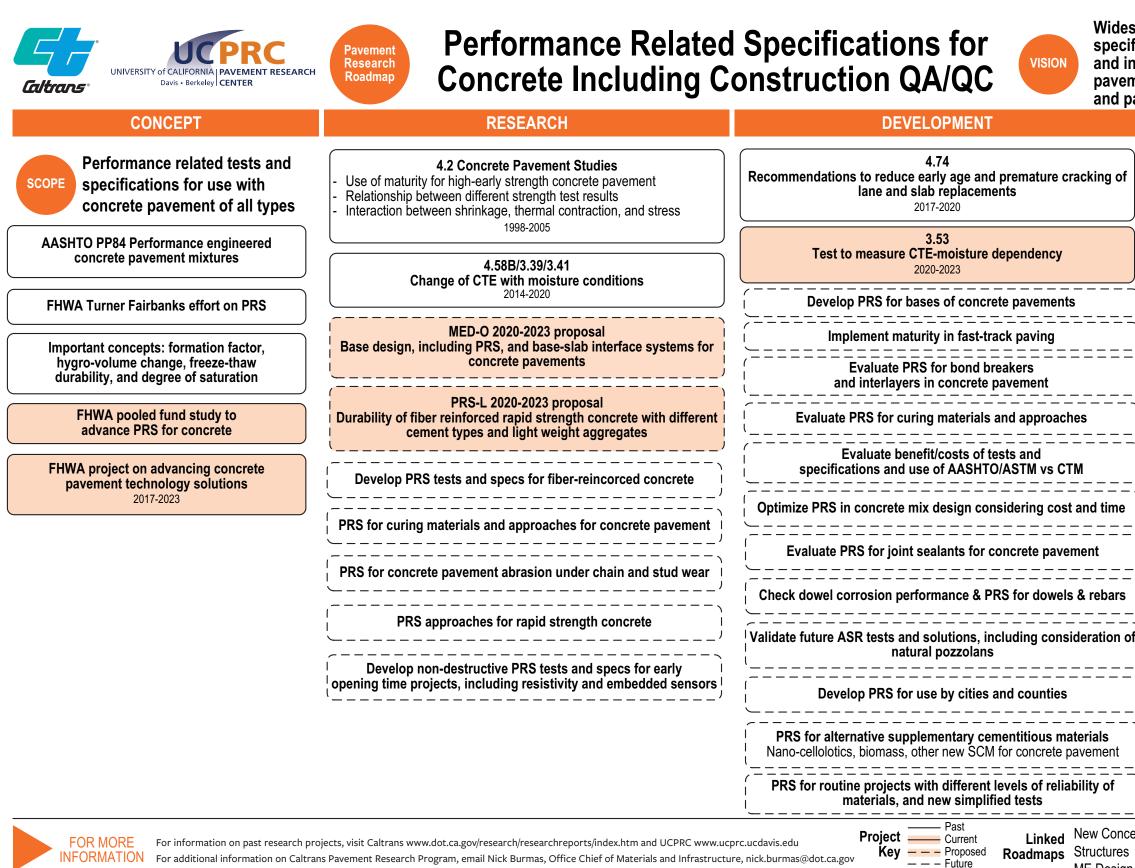

PARTNERED PAVEMENT RESEARCH CENTER 86 ANNUAL REPORT FISCAL YEAR 2020-2021 PARTNERED PAVEMENT RESEARCH CENTER 87

Widespread use of appropriate tests and specifications for QC/QA of materials that measure and influence the critical properties affecting pavement performance; integrate with materials and pavement design procedures


IMPLEMENTATION

of	ng in PRS in concrete where there are gaps		
	ocal government on PRS		
Continue operati	on of Caltrans CTE website		
=='			
'			
ne))			
rs '			
n of /			
it			
= _ ^ ^			
— — ² oncepts for Materials & res	Pavement Research Roadmap Performance Related Specifications for Concrete Including Construction QA/QC		

ME Design Concrete

version date December 04, 2020

Performance Related Specifications for Asphalt Superpave and QC/QA

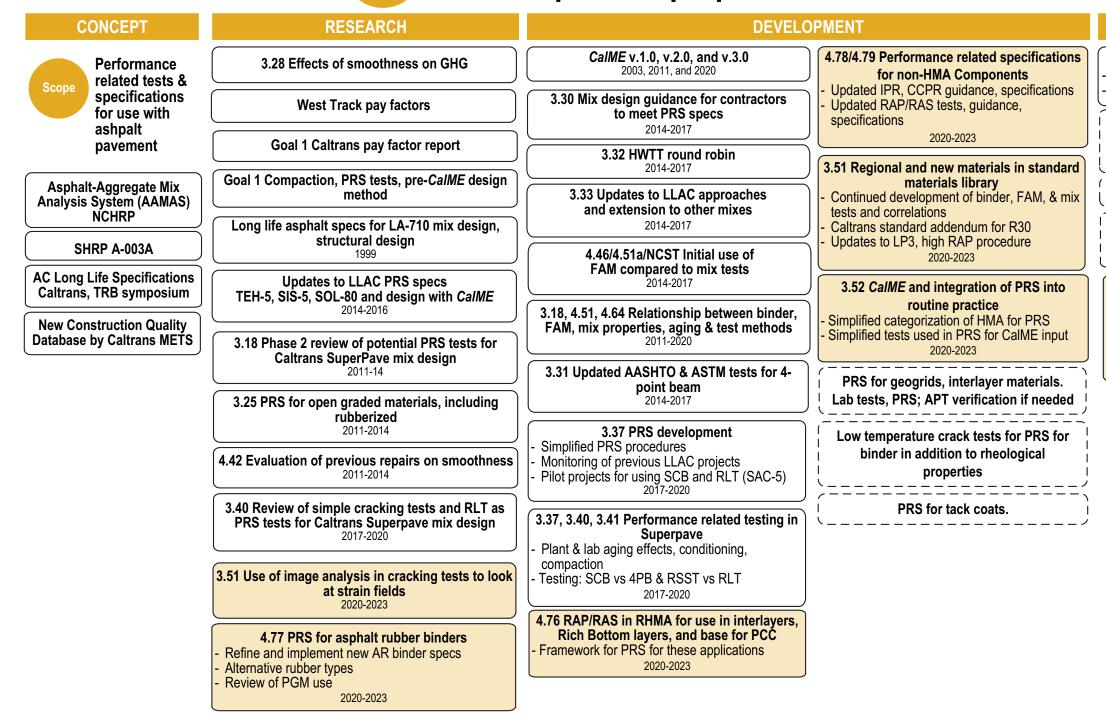



Caltrans

For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu
 For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov

Project Past Current Proposed

Current Most of the pro Current Rubberized As Proposed roadmaps

Pavement Research Roadmap

UNIVERSITY of CALIFORNIA PAVEMENT RESEARCH Davis • Berkelev CENTER

PARTNERED PAVEMENT RESEARCH CENTER

Widespread use of appropriate tests and specifications for QC/QA of materials that measure and influence the critical properties affecting pavement performance; integrate with materials and pavement design procedures

IMPLEMENTATION

Pilot and AC long life projects

I-710 AC Long Life (1999); TEH-5, SIS-5, SOL-80 (2011-14) SAC-5 (2017-2020)

Cost/benefit analysis, LCA of extension of PRS state-wide Determination of improvements, identification of project types where PRS does not have high benefit/cost

PaveM follow up on PRS projects


CCPIC PRS for local government Where beneficial, adaptation for local government constraints

3.52 CaIME and integration of PRS into routine practice Roadmap and support for Caltrans, industry to do testing, analysis

Training, new tests, integration of new materials, implementation of classification framework

2020-2023

Most of the projects in this roadmap also appear in ME Design, Rubberized Asphalt, RAP/RAS, Smoothness and other Pavement Research Roadmap Asphalt PRS & QC QA version date December 07, 2020

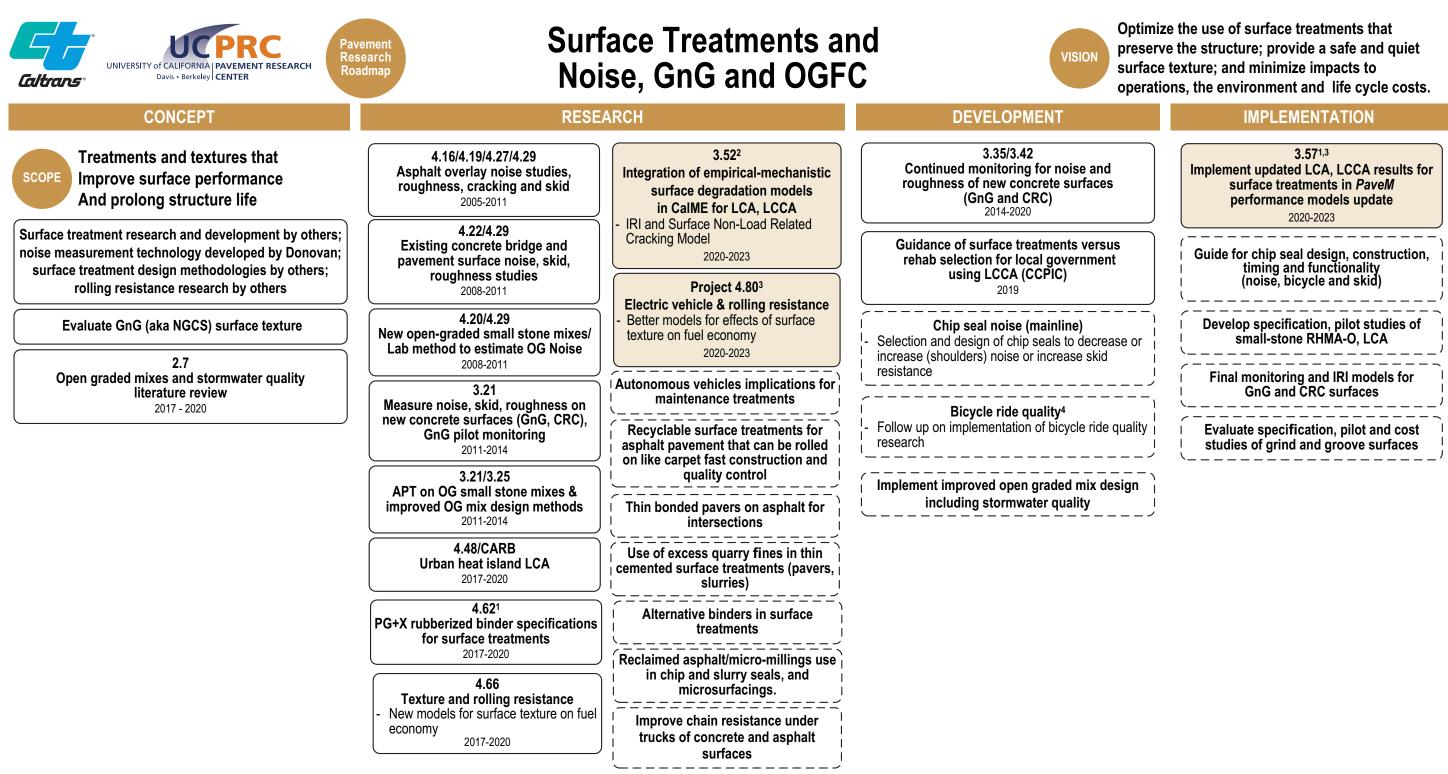

– Past Project _____ Current Linked FOR MORE For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu Key --- Proposed Roadmaps ³ LCA NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov — – Future ⁴ Smoothness

PARTNERED PAVEMENT RESEARCH CENTER 90 ANNUAL REPORT FISCAL YEAR 2020-2021

PARTNERED PAVEMENT RESEARCH CENTER

¹ Asphalt rubber ² Asphalt ME design (CaIME)

Pavement Research Roadmap Surface Treatments and Noise, GnG and OGFC version date December 4, 2020

91 ANNUAL REPORT FISCAL YEAR 2020-2021



ice. n

Use best available climate change information in tactical and strategic transportation infrastructure decision-making. Use pavement and street systems to help VISION reduce environmental impacts and create economically and socially vibrant public places that promote personal mobility, healthy choices and safe communities.

CONCEPT

SCOPE

California legislation and policy


directives regarding climate resilience

strategy, development, communication and implementation in California and interaction of pavement design and street design on active transportation (non-motorized).

Climate Change updates	Officials activities	
US Global Climate Change Research Program	Complete Streets America activities	
Climate adaptation strategy (Nat Res Agency) 2009	NCST Urban Metabolism (UM) LCA framework considering permeability and water cycle ¹ 2018	
California climate scoping plan (CARB)		
2013	NCST Road Map for Permeable Pavement	
Nat Res Agency: Safeguarding California Reducing Climate Risk 2014, 2017	Research 2017	
IC Net northeastern US climate modeler and infrastructure managers network (NSF) 2012	Coastal and ocean climate action team (COCAT) impacts on coastal resources (Caltrans)	
CalAdapt climate change research, UC Berkeley, California Energy Commission	ICNet northeastern US climatologist/ infrastructure managers network (NSF) 2012-2017	
Literature and concepts developed by others using the Complete Streets	Climate change	

Multi-Functional Pavements for Climate Resilie	n
Urban Environments, and Active Transportation	01

RESEARCH

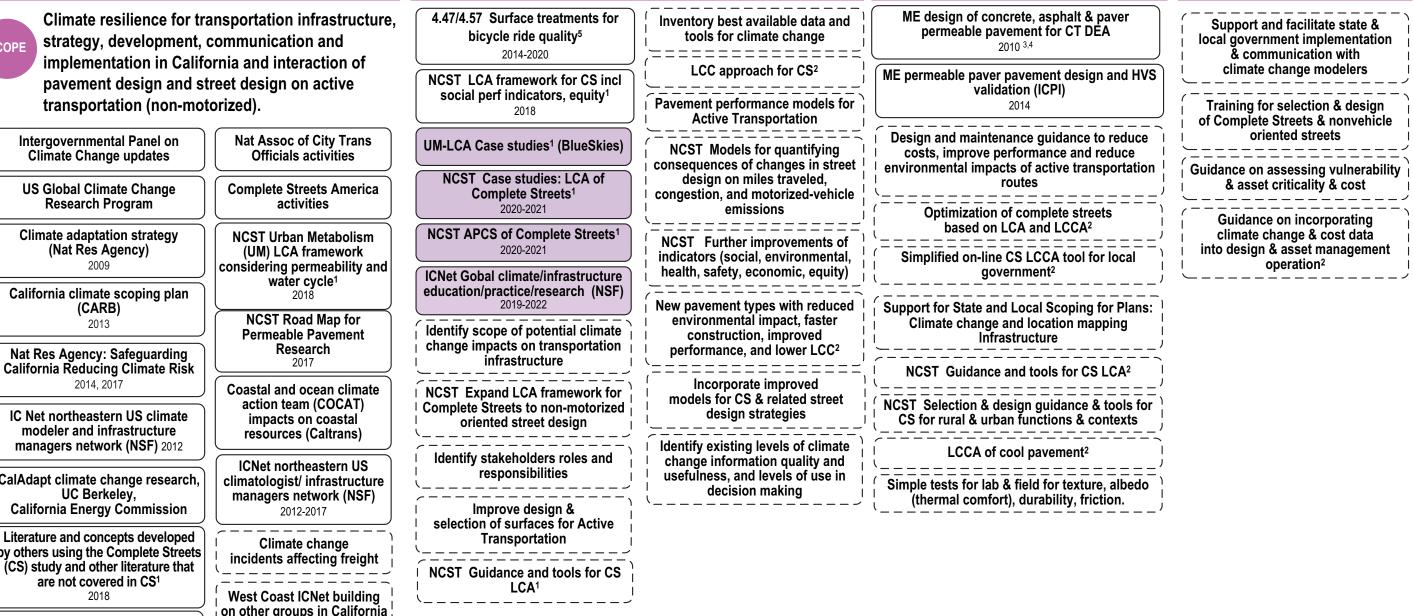

Project _____ Current FOR MORE For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu Key — — — Proposed NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov — – Future

¹ Roadwav LCA ² LCCA ⁵ Smoothness

Linked

Roadmaps

DEVELOPMENT

(through CCPIC)


PARTNERED PAVEMENT RESEARCH CENTER

– Past

IMPLEMENTATION

³ ME Design Concrete ⁴ ME Design Asphalt

Pavement Research Roadmap Multi-Functional Pavements for Climate Resilience, Urban Environments, and Active Transportation version date December 09, 2020

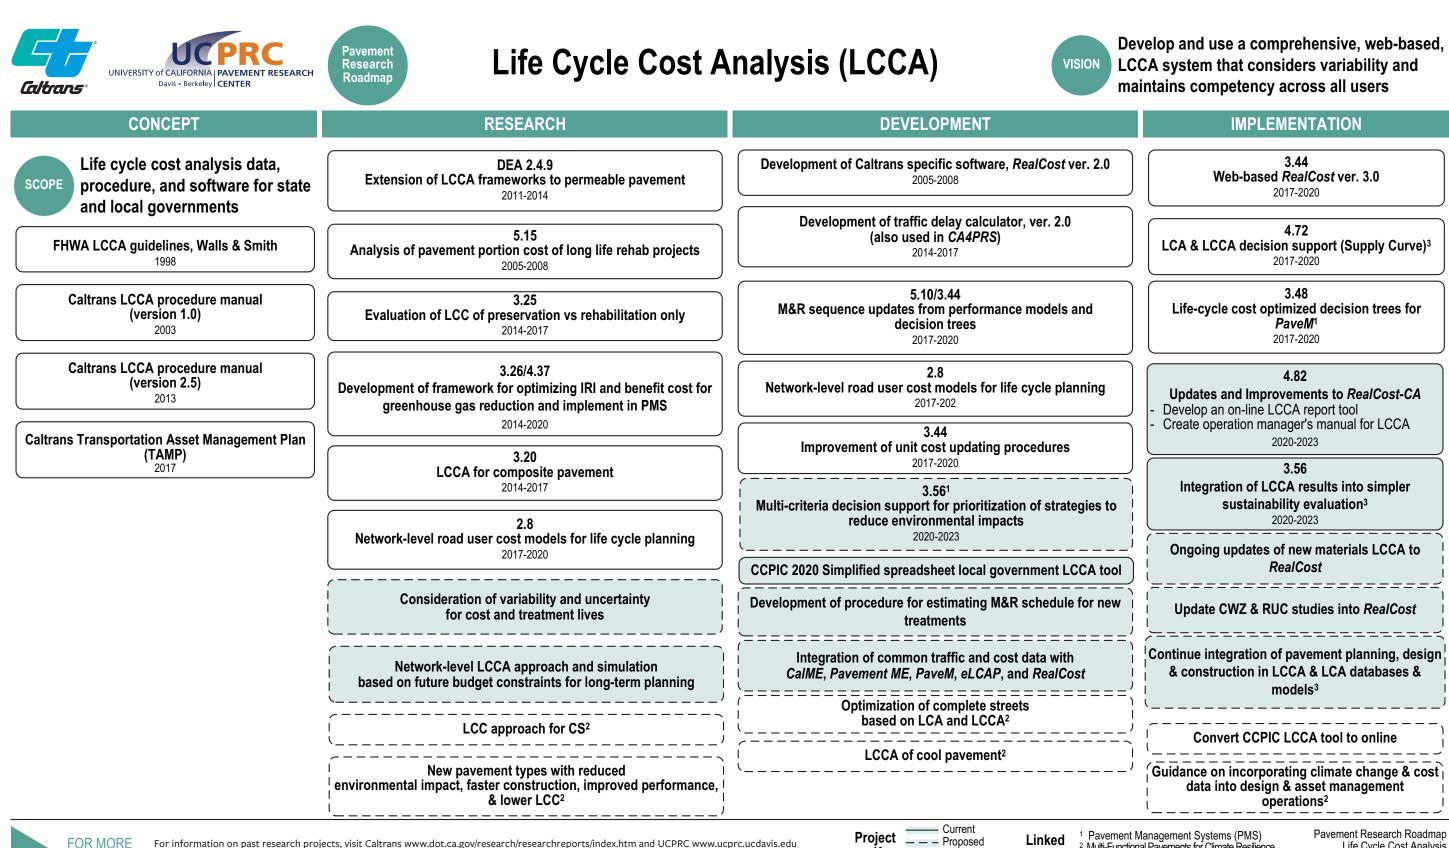

INFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov


Project ___ Proposed Key - - - Future Roadmaps — Past

PARTNERED PAVEMENT RESEARCH CENTER 95

² Multi-Functional Pavements for Climate Resilience ³ Roadway LCA

Life Cycle Cost Analysis version date December 04, 2020 **Roadway Life Cycle Assessment**

VISION

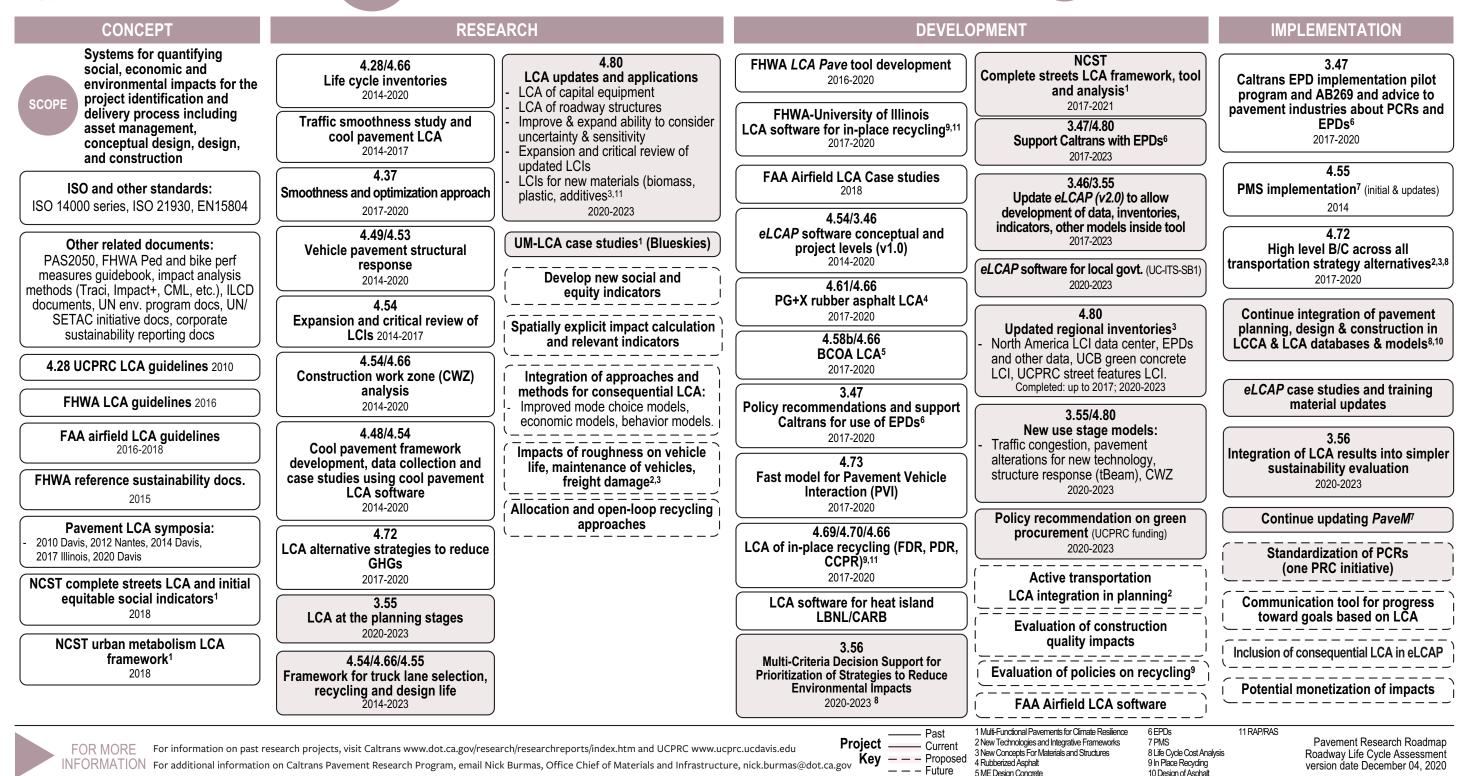


UNIVERSITY of CALIFORNIA | PAVEMENT RESEARCH Davis · Berkeley CENTER

Caltrans

PARTNERED PAVEMENT RESEARCH CENTER 97

To be able to quantitatively assess the social, economic and environmental impacts of transportation infrastructure

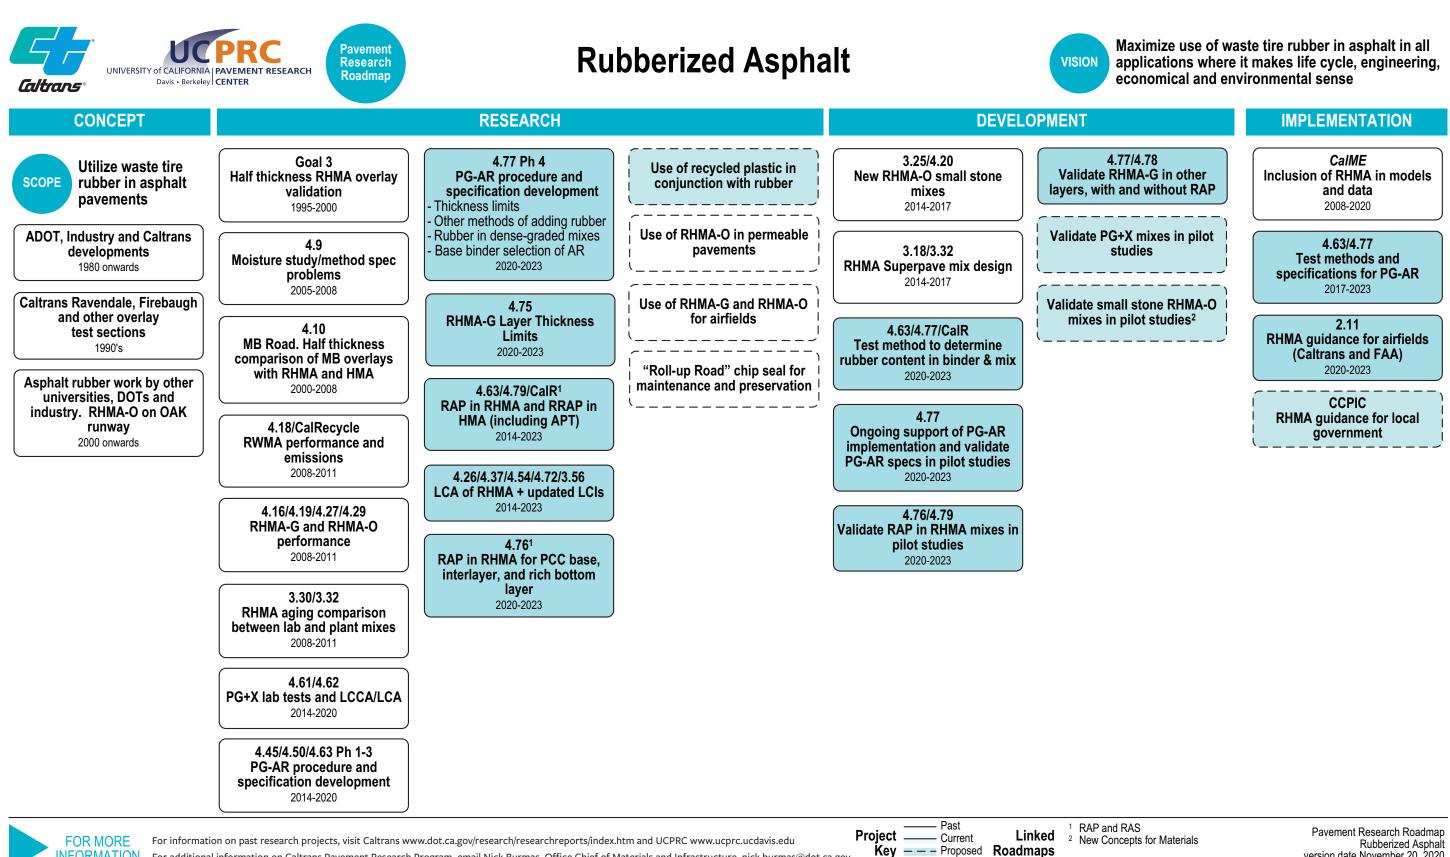

NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov

PARTNERED PAVEMENT RESEARCH CENTER 98 ANNUAL REPORT FISCAL YEAR 2020-2021 PARTNERED PAVEMENT RESEARCH CENTER 99

— — – Future

Rubberized Asphalt version date November 20, 2020



FOR MORE

Davis • Berkeley CENTER

Recycled Asphalt Pavement (RAP) and Pavement Research **Recycled Asphalt Shingles (RAS)** Roadmap

VISION

RESEARCH CONCEPT DEVELOPMENT 4.64/3.40 3.18/3.30/4.20 4.46 Use of reclaimed Validation of high RAP mixes Ph2 High RAP mixes in long life Prelim study on RAP/RAS SCOPE asphalt in pavement with APT and field monitoring Use of FAM testing to predict design Properties applications binder properties Prelim testing on FAM mixes 2011-2014 Initial study of high RAP mixes Initial investigation of RAP/RAS including effect of silo storage **RAP/RAS** research by other binders Assess multiple RAP-use QC/QA tests for cracking 4.54² universities, DOTs and industry cycles 2011-2014 2017-2020 LCA of optimal transport (List main studies on high RAP/ distance for recycled materials RAS) 4.76² 2014-2017 NCST RAP in RHMA for PCC base, Develop new materials with Study of RAP/RAS binder interlayer, and rich bottom high RAP and rubber blends with virgin binder laver Develop FAM mix testing Evaluate properties of RAP in procedure RHMA-G Explore use of FAM as an Use of RAP with non-petroleum Conduct ME design alternative to extraction based binders 2020-2023 2011-2014 4.79 Impact of future changes in the Guidance, Tests, and 4.51A/FAA oil refining industry on use of Specification of high RAP/RAS Ph1 RAP Effect of rejuvenators FAM test instead of extraction Long-term lab- and field-aging Blending chart validation of RAP mixes LCA of RAP mixes including Effect of RAP in PM mixes Simplified tests for QC/QA updating inventory of 2011-2014 testing of RAP mixes rejuvenating additives 2020-2023 CalRecycle RAP in RHMA and RRAP in HMA 2011-2014 4.72¹ LCCA/LCA for use of RAP in HMA and RHMA 2017-2020 CalRecycle RAP in RHMA-G and RHMA-O Prelim Investigation on use of

— Past 1 LCA Pavement Research Roadmap Project _____ Current Linked For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu 2 Rubberized Recycled Asphalt Pavement (RAP) & Recycled Asphalt Shingles (RAS) Key - - - Proposed Roadmaps Asphalt INFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov version date December 04, 2020 — — – Future

PARTNERED PAVEMENT RESEARCH CENTER 100 ANNUAL REPORT FISCAL YEAR 2020-2021

coarse-graded RAP

2017-2020

Optimize the use of reclaimed asphalt in new asphalt mixes for cost, environmental impacts, and performance over multiple lifecycles


IMPLEMENTATION

FAA Airfield LCA RAP case study 2014-2017

4.79/4.64/3.40 FAM test to evaluate binder + cracking tests for mix design and QC/QA 2017-2023

Guidance for effective use of RAP/RAS, including CalME models 2020-2023

Suggested specification language updates for RAP/RAS mixes 2020-2023

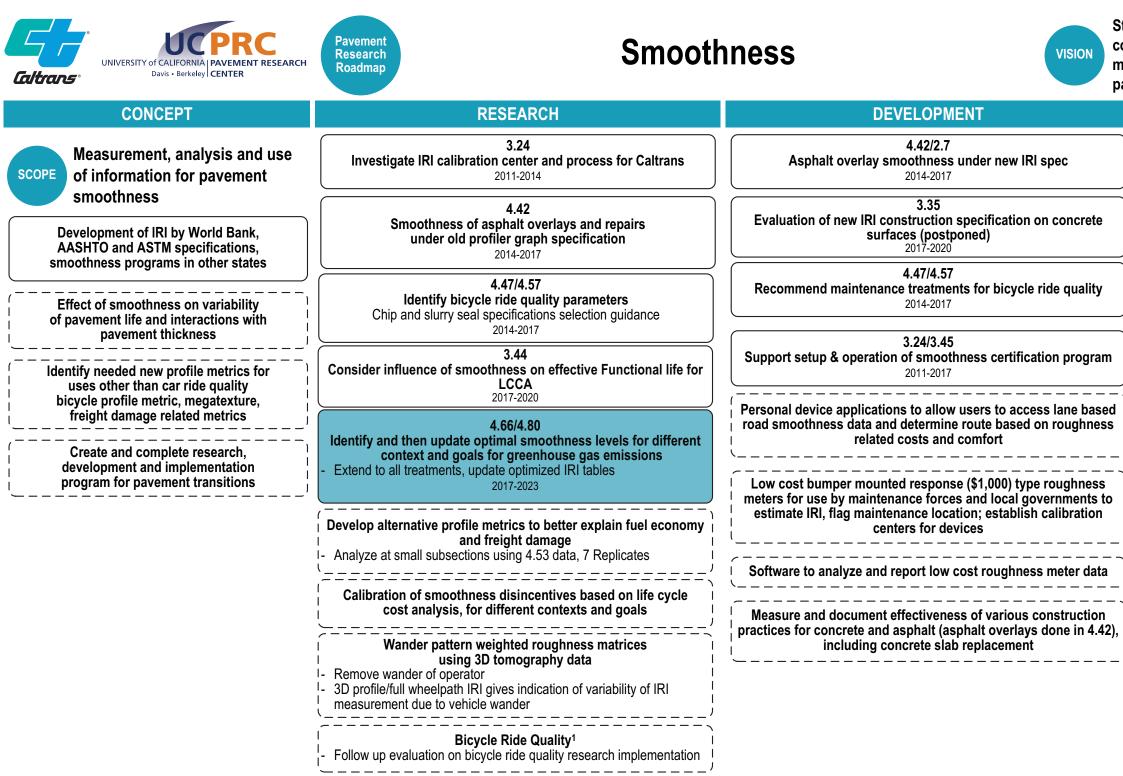

— Past Project _____ Current FOR MORE For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu Key --- Proposed Roadmaps NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov — — — Future

PARTNERED PAVEMENT RESEARCH CENTER 102 ANNUAL REPORT FISCAL YEAR 2020-2021

Standardize practice of the best methods for cost efficiently providing smooth pavements to maximize fuel economy, user comfort and pavement life, and minimize freight damage

	IMPLEMENTATION
	2.3 Ongoing operation of IRI calibration center & process for Caltrans & contractors projects & mix designs
	Support implementation of smoothness specification modifications
	Demonstration of construction technologies to improve smoothness IRI behind pavers larger technology rodeo or pilot project ²
((Support implementation of low cost bumper mounted response meters for maintenance problem location and local government IRI measurement
	Operate low cost roughness meter calibration center
(Implement optimized smoothness disincentives
(Make available personal device application for smoothness data for road users
) 	Implement new profile metrics in pavement management


Linked ¹ Multi-functional pavement ² New materials and structures

Pavement Research Roadmap Smoothness version date December 04, 2020



Pavement **Pavement Management Systems (PMS)** Research Roadmap

VISION

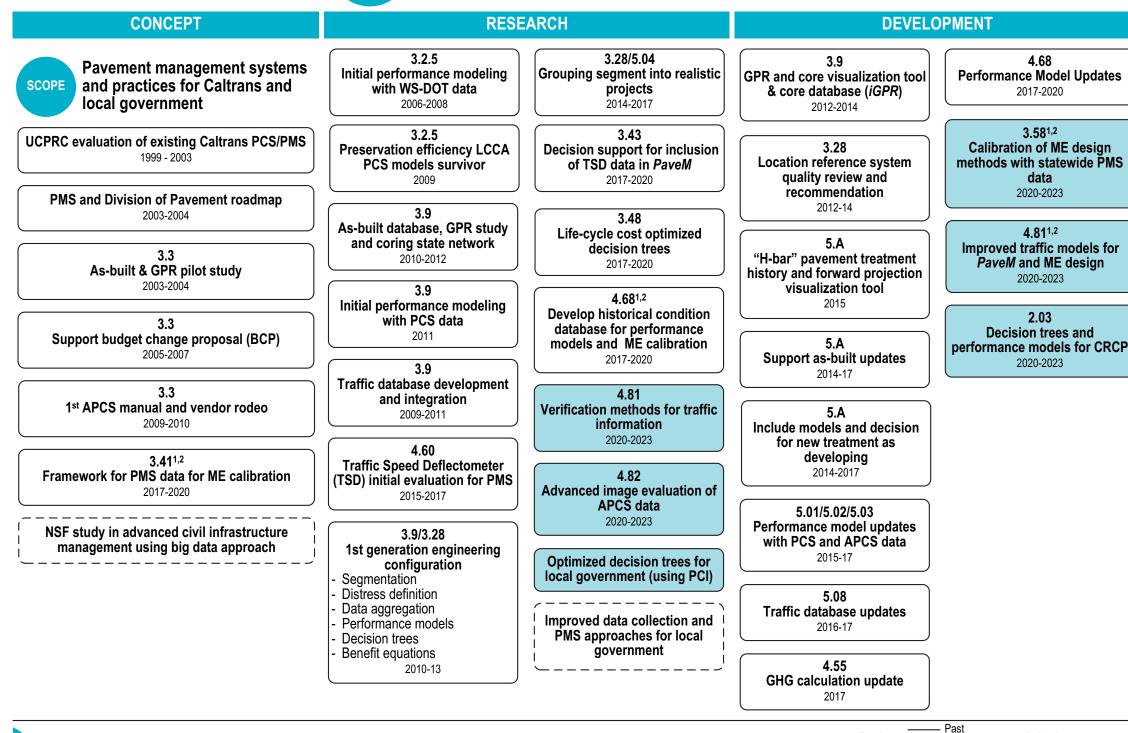


Project _____ Current FOR MORE For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu Key — — – Proposed Roadmaps ² ME Design of Concrete NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov — — – Future

Proactively manage networks to maximize efficiency within budgetary and policy constraints with regards to performance, cost and environmental impact

	IMPLEMENTATION
	3.9 APCS contractor selection 2010
	3.9 QA of GPR and first APCS contracts 2011-12
	5.A/5.07 2014 LRS update and integration of MAP21 NHS 2015
	5.A PMS and asset management integration 2017
P	2.10 PMS Support - PMS training and assistance - Traffic updating - As-Built updating & QA - LRS updating & QA - PaveM portal, H-Bar, RP-List - Other improvements 2017-2020
	3.57 ^{1,2} Tri-annual update for <i>PaveM</i> performance models and GHG equations 2020-2023
	2.03 Continued PaveM support, including integration with DIME Restructure PaveM project information 2020-2023
	PMS for ramps, connectors, parking lots
	Implementation support and training for local government on PMS principles and best practices

Linked ¹ ME Design of Asphalt

Pavement Research Roadmap PMS version date December 4, 2020

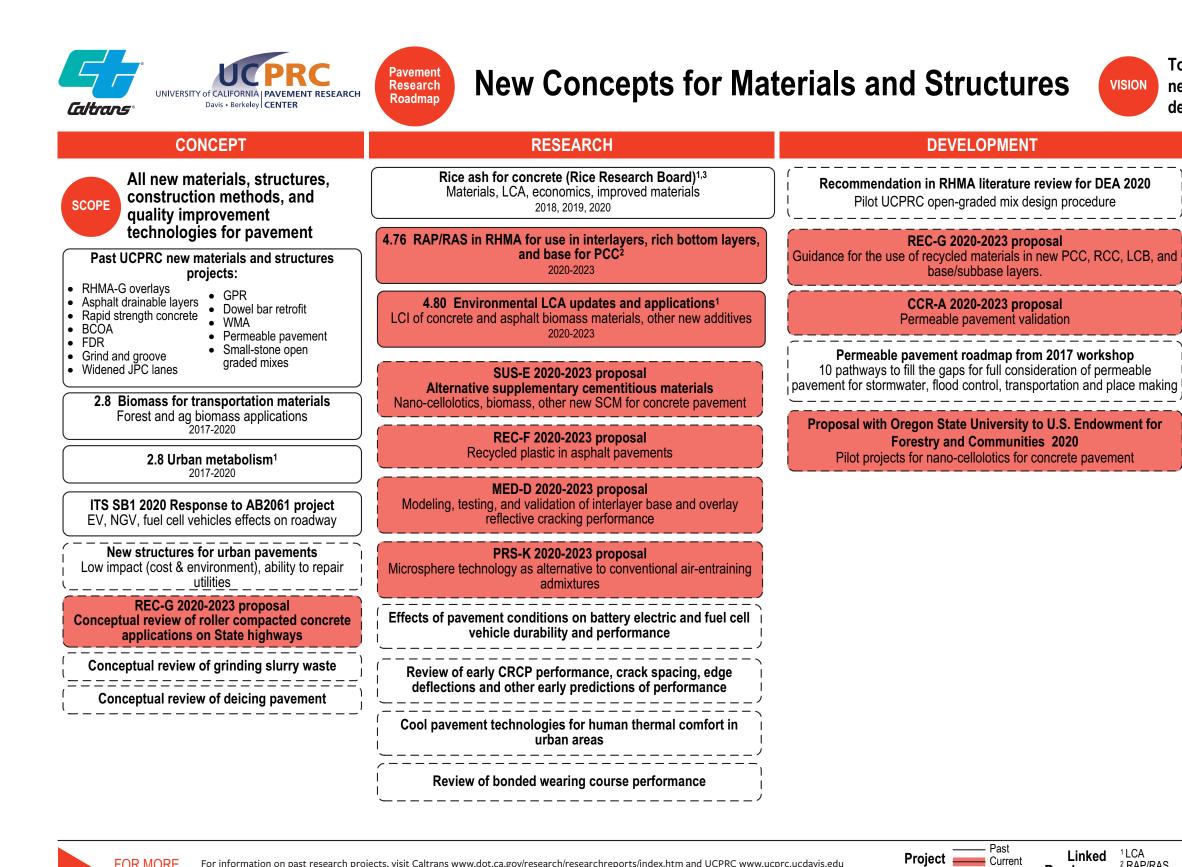

For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu

NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov

VISION

PARTNERED PAVEMENT RESEARCH CENTER 106 ANNUAL REPORT FISCAL YEAR 2020-2021

FOR MORE

PARTNERED PAVEMENT RESEARCH CENTER 107

Key ---- Proposed

– – – Future

To quickly and cost efficiently evaluate new technologies and comprehensively develop those that are promising

IMPLEMENTATION



3.21/3.35/3.42 Monitoring of grind and groove pilot projects 2011-2020

2.10 Add CRC decision trees to PMS (PaveM) 2020-2023


CRC repair guidance

² RAP/RAS ³ ME Design Concrete

¹LCA

Roadmaps

Pavement Research Roadmap New Concepts for Materials and Structures version date December 04, 2020

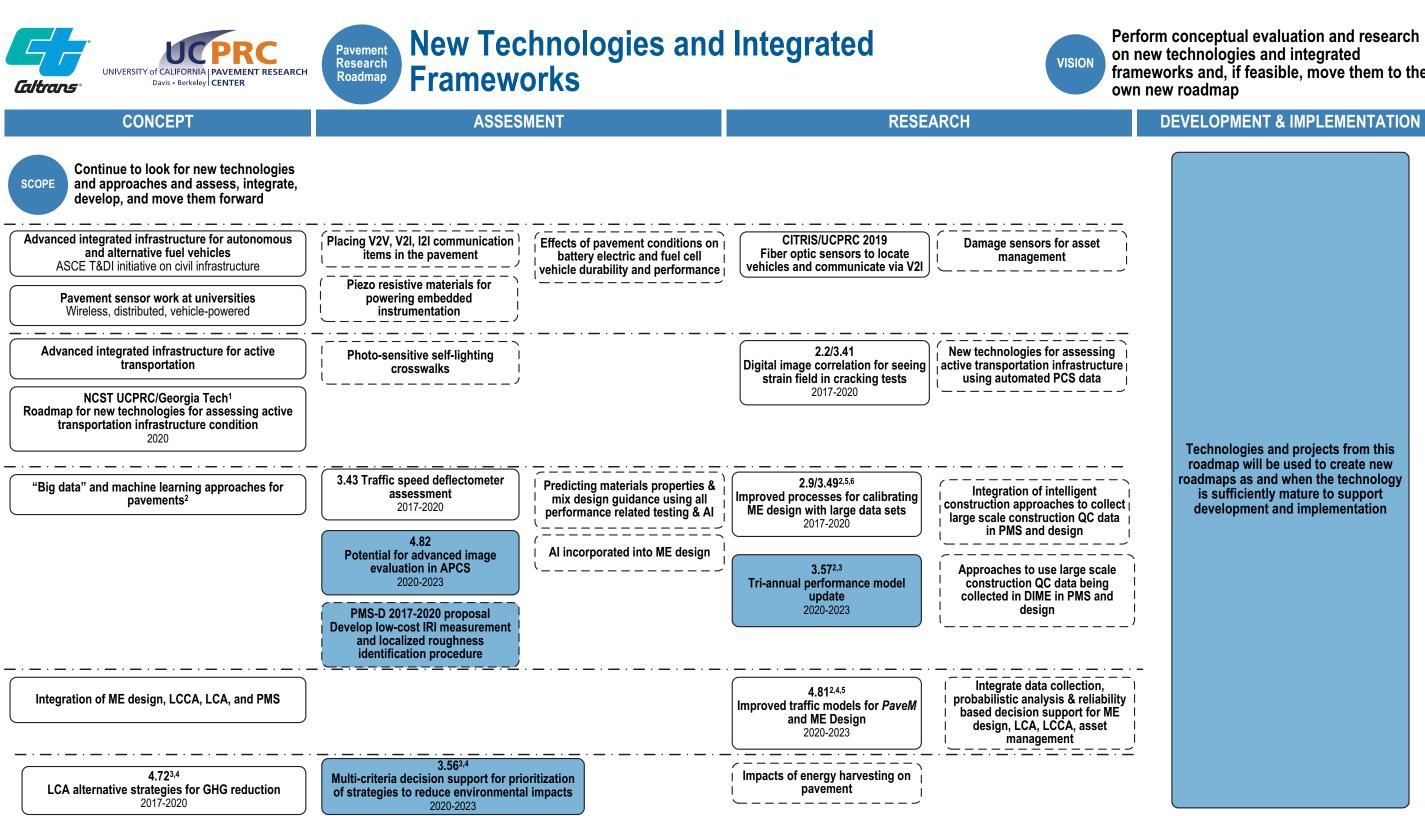

— Past ¹ Active Transportation. ² PMS Project _____ Current Linked ³ LCA, ⁴ LCCA FOR MORE For information on past research projects, visit Caltrans www.dot.ca.gov/research/researchreports/index.htm and UCPRC www.ucprc.ucdavis.edu Key – – – Proposed Roadmaps ⁵ ME Design Asphalt NFORMATION For additional information on Caltrans Pavement Research Program, email Nick Burmas, Office Chief of Materials and Infrastructure, nick.burmas@dot.ca.gov — – Future ⁶ ME Design Concrete

PARTNERED PAVEMENT RESEARCH CENTER **109**

frameworks and, if feasible, move them to their

Pavement Research Roadmap New Technologies & Integrated Frameworks version date December 04, 2020







